

**Daimler AG  
Daimler Buses - EvoBus GmbH  
MAN Truck & Bus AG  
Scania AB**

**Scania CV  
Volvo Truck Corporation  
Volvo Bus Corporation  
Renault Trucks**

**CNH Industrial  
DAF Trucks N.V.  
VDL Bus & Coach B.V.**

# **FMS-Standard description**

**Version 04**

**17.09.2021**

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>		Page  <b>2 (61)</b>	
Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>			Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
Subject  <b>FMS-Standard description</b>						
<p style="text-align: center;"><b>General annotations</b></p> <ul style="list-style-type: none"> <li>- Data might be not available during ignition off / main switch off</li> <li>- Most of the values are reliable after ca. 10 seconds after “ignition on”. *</li> <li>- Physical Layer according to ISO 11898 (250kb/s)</li> <li>- Application Layer according SAE J1939/ 71</li> <li>- Data Link Layer according SAE J1939/ 21</li> <li>- If there is a discrepancy between definitions in this document and the SAE, the SAE documents are valid only except broadcast for <ul style="list-style-type: none"> <li>* PGN 0x00FE6B (Driver ID)</li> <li>* PGN 0x00FE70 (Combination Vehicle Weight)</li> <li>* PGN 0x00FEE6 (Time/Date)</li> <li>* PGN 0x00FCB7 (Vehicle Electrical Power #4)</li> <li>* PGN 0x00FDC2 (Electronic Engine Controller 14)</li> <li>* PGN 0x00FEAF (Fuel Consumption (Gaseous))</li> <li>* PGN 0x00F009 (Vehicle Dynamic Stability Control 2)</li> <li>* PGN 0x00FEFC (Dash Display 1): Only used if different fuel types in different storage container  Fuel Level 1 represents always the fuel used for driving without indication of the location of the storage container.  Fuel Level 2 is not indicating the location of the storage container</li> <li>* PGN 0x00F009 (Vehicle Dynamic Stability Control 2) repetition rate is 100 ms instead of 10 ms</li> </ul> </li> <li>- The priority/source address of each OEM is different.</li> <li>- If the information is delivered the function/data has to be delivered according FMS-standard definition.</li> <li>- The description of the connector(s) can be downloaded in the download area of FMS-Standard (Bus and Truck)</li> </ul>						

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>		Page  <b>3 (61)</b>
Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>			Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>
Subject  <b>FMS-Standard description</b>					
<ul style="list-style-type: none"> <li>- If the information is not available the function/data has to be sent as not available according to SAE</li> <li>- “not used for (Bus) FMS-standard” means that there might be data sent according SAE but are not used in (Bus) FMS-standard interface. If no information is sent, then it has to be sent as “not available” (don’t care).</li> <li>- “reserved for (Bus) FMS-standard” means that as long as there is no definition it is sent “FF (not available)”</li> <li>- The accuracy/interpretation of signals might differ depending on vehicle brand/models *.</li> <li>- (Bus) FMS-Standard is designed for Diesel engines. If it is used in vehicles with other engine types (e.g. dual engine) the information delivered might be different:*</li> </ul> <p>* Details can be obtained from the OEM</p>					

<p>Daimler AG Daimler Buses-EvoBus GmbH MAN Truck &amp; Bus AG Scania AB</p>	<p>Scania CV Volvo Truck Corporation Volvo Bus Corporation Renault Trucks</p>	<p>CNH Industrial DAF Trucks N.V. VDL Bus &amp; Coach B.V.</p>	<p>Name of document <b>FMS-Standard</b></p>		<p>Page <b>4 (61)</b></p>
<p>Issuer (dept., name, phone, sign) <b>ACEA Task Force HDEI/BCEI</b></p>			<p>Date <b>17.09.2021</b></p>	<p>Approved <b>Final</b></p>	<p>Issue <b>Version 04</b></p>
<p>Subject <b>FMS-Standard description</b></p>					
<p><b>History</b></p>					
<p><b>Truck</b></p>			<p><b>Bus</b></p>		
<p><b>Changes / Addition to Vers. 01.00 Oct. 2009</b></p> <ul style="list-style-type: none"> <li>• added history</li> <li>• change of DaimlerChrysler to Daimler</li> <li>• added Renault Trucks</li> <li>• update General Annotation</li> <li>• added description acc. SAE (based on Jan 2008 version)</li> <li>• deleted SAE ref as no longer valid</li> <li>• added additional comments</li> <li>• correction of PGNs (dez) in Example for BAM</li> <li>• added Priority to Example for BAM</li> <li>• added 2.2 Example SW Identification for buses and/or trucks</li> <li>• added Overview Messages</li> </ul>			<p><b>Changes / Addition to Vers. 00.01:</b></p> <ul style="list-style-type: none"> <li>• added Driver Identification DI</li> <li>• added Fuel Economy LFE</li> <li>• added Tell Tale Status TTS</li> <li>• added Example Tell Tale Status</li> <li>• added Overview Messages</li> <li>• added description acc. SAE J 1939 to the PGN's</li> <li>• added additional comments to the PGN's</li> </ul>		
<p><b>Changes / Addition to Vers. 02.00 Sept. 2010</b></p> <ul style="list-style-type: none"> <li>• update History</li> <li>• added 1.14 Ambient Conditions: AMB</li> <li>• added 1.15 Driver's Identification: DI</li> <li>• added 1.16 Fuel Economy: LFE</li> <li>• added 1.2 EEC2: Engine Percent Load At Current Speed</li> <li>• added 1.17 PTO Drive Engagement: PTODE</li> <li>• added 1.18 High Resolution Fuel Consumption (Liquid): HRLFC</li> <li>• update 3. Overview Messages</li> <li>•</li> </ul>			<p><b>Changes / Addition to Vers. 00.02 dated 07.07.2009</b></p> <ul style="list-style-type: none"> <li>• Page 36: Remark for accelerator position: "Daimler calculate from torque demand" deleted</li> </ul>		
<p><b>Changes / Additions to Vers. 02.00 Nov. 2010</b></p> <ul style="list-style-type: none"> <li>• some editorial corrections</li> </ul>					

<p><b>Daimler AG</b>  <b>Daimler Buses-EvoBus GmbH</b>  <b>MAN Truck &amp; Bus AG</b>  <b>Scania AB</b></p>	<p><b>Scania CV</b>  <b>Volvo Truck Corporation</b>  <b>Volvo Bus Corporation</b>  <b>Renault Trucks</b></p>	<p><b>CNH Industrial</b>  <b>DAF Trucks N.V.</b>  <b>VDL Bus &amp; Coach B.V.</b></p>	<p>Name of document  <b>FMS-Standard</b></p>		<p>Page  <b>5 (61)</b></p>
<p>Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b></p>			<p>Date  <b>17.09.2021</b></p>	<p>Approved  <b>Final</b></p>	<p>Issue  <b>Version 04</b></p>
<p>Subject  <b>FMS-Standard description</b></p>					
<p><b>Version 03 dated 12.03.2012</b>  <b>One document for Bus and Truck FMS-Standard</b></p> <p><b>Truck and Bus:</b></p> <ul style="list-style-type: none"> <li>• update History</li> <li>• update company names</li> <li>• update General Annotation</li> <li>• added SPN 513 Actual Engine – Percent Torque</li> <li>• added High Resolution Fuel Consumption (Liquid) HRLFC</li> <li>• added Aftertreatment 1 Diesel Exhaust Fluid Tank 1 Level</li> <li>• added FMS Tell Tale Status : FMS1</li> <li>• update example tell tale status</li> <li>• additions to additional comments</li> <li>• update Overview messages</li> </ul> <p><b>Truck section:</b></p> <ul style="list-style-type: none"> <li>• added Combination Vehicle Weight: CVW</li> <li>• added Electronic Retarder Controller 1: ERC1</li> <li>• added 1.22 Air Supply Pressure : AIR1</li> <li>• update 3. Overview Messages</li> </ul>			<p><b>Version 03 dated 12.03.2012</b>  <b>One document for Bus and Truck FMS-Standard</b></p> <p><b>Truck and Bus:</b></p> <ul style="list-style-type: none"> <li>• update History</li> <li>• update company names</li> <li>• update General Annotation</li> <li>• added SPN 513 Actual Engine – Percent Torque</li> <li>• added High Resolution Fuel Consumption (Liquid) HRLFC</li> <li>• added Aftertreatment 1 Diesel Exhaust Fluid Tank 1 Level</li> <li>• added FMS Tell Tale Status : FMS1</li> <li>• update example tell tale status</li> <li>• additions to additional comments</li> <li>• update Overview messages</li> </ul> <p><b>Bus section:</b></p> <ul style="list-style-type: none"> <li>• connector description in separate file</li> </ul>		
<p><b>Version 03 dated 28.01.2016</b></p> <p><b>Truck and Bus:</b></p> <ul style="list-style-type: none"> <li>• update History</li> <li>• correction of ISO No. for Tell Tale ID 53</li> </ul>			<p><b>Version 03 dated 28.01.2016</b></p> <p><b>Truck and Bus:</b></p> <ul style="list-style-type: none"> <li>• Update History</li> <li>• correction of ISO No. for Tell Tale ID 53</li> </ul>		

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document <p style="text-align: center;"><b>FMS-Standard</b></p>		Page <p style="text-align: center;"><b>6 (61)</b></p>	
Issuer (dept., name, phone, sign) <p style="text-align: center;"><b>ACEA Task Force HDEI/BCEI</b></p>			Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
Subject <p style="text-align: center;"><b>FMS-Standard description</b></p>						
<p style="text-align: center;"><b>Version 04 dated 13.10.2017</b></p> <p><b>Truck and Bus:</b></p> <ul style="list-style-type: none"> <li>• update History</li> <li>• added Electronic Brake Controller 1: EBC1</li> <li>• added Electronic Engine Controller 14: EEC14</li> <li>• added Fuel Consumption (Gaseous): GFC</li> <li>• added SPN 38 Fuel Level 2</li> <li>• added Truck and Bus: Retarder Information : ERC1 (moved from Truck only)</li> <li>• added Tell Tale No 61-64</li> <li>• update 3. Overview Messages</li> <li>• renamed PGN 0x00FEFC: Dash Display 1: DD1</li> </ul> <p><b>Truck section:</b></p> <ul style="list-style-type: none"> <li>• added SPN 70 Parking Brake Switch</li> <li>• added SPN 527 Cruise Control States</li> <li>• renamed PGN 0x00FEF1: Cruise Control/Vehicle Speed 1: CCVS1</li> </ul>			<p style="text-align: center;"><b>Version 04 dated 13.10.2017</b></p> <p><b>Truck and Bus:</b></p> <ul style="list-style-type: none"> <li>• update History</li> <li>• added Electronic Brake Controller 1: EBC1</li> <li>• added Electronic Engine Controller 14: EEC14</li> <li>• added Fuel Consumption (Gaseous): GFC</li> <li>• added SPN 38 Fuel Level 2</li> <li>• added Truck and Bus: Retarder Information : ERC1 (moved from Truck only)</li> <li>• added Tell Tale no 61-64</li> <li>• update 3. Overview Messages</li> <li>• renamed PGN 0x00FEFC: Dash Display 1: DD1</li> </ul> <p><b>Bus section:</b></p> <ul style="list-style-type: none"> <li>• added SPN 527 Cruise Control States</li> <li>• added SPN5464 Hybrid Battery Pack Remaining Charge</li> <li>• added SPN 1807 Steering Wheel Angle</li> </ul>			

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>		Page  <b>7 (61)</b>
Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>			Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>
Subject  <b>FMS-Standard description</b>					
<div data-bbox="91 411 1115 639" style="border: 1px solid black; padding: 10px; margin: 10px;"> <p style="text-align: center;"><b>Version 04 dated 17.09.2021</b></p> <p><b>Truck and Bus:</b></p> <ul style="list-style-type: none"> <li>• update History</li> <li>• added Tell Tale No 65-69</li> </ul> </div>					

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>		Page  <b>8 (61)</b>																																																																																																						
Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>			Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>																																																																																																						
Subject  <b>FMS-Standard description</b>																																																																																																											
<table border="0"> <tr> <td><b>1</b></td> <td><b>PARAMETERS FOR FMS GATEWAY (ACCORDING SAE J1939)</b></td> <td><b>10</b></td> </tr> <tr> <td>  <b>1.1</b></td> <td><b>Parameters for Bus and Truck FMS-Standard</b></td> <td><b>10</b></td> </tr> <tr> <td>    1.1.1</td> <td>Fuel Consumption: LFC</td> <td>10</td> </tr> <tr> <td>    1.1.2</td> <td>Dash Display 1: DD1</td> <td>11</td> </tr> <tr> <td>    1.1.3</td> <td>Electronic Engine Controller #1: EEC1</td> <td>12</td> </tr> <tr> <td>    1.1.4</td> <td>Engine Hours, Revolutions: HOURS</td> <td>13</td> </tr> <tr> <td>    1.1.5</td> <td>Vehicle Identification: VI</td> <td>14</td> </tr> <tr> <td>    1.1.6</td> <td>FMS-standard Interface Identity / Capabilities: FMS</td> <td>15</td> </tr> <tr> <td>    1.1.7</td> <td>High Resolution Vehicle Distance: VDHR</td> <td>17</td> </tr> <tr> <td>    1.1.8</td> <td>Tachograph : TCO1</td> <td>18</td> </tr> <tr> <td>    1.1.9</td> <td>Engine Temperature 1: ET1</td> <td>20</td> </tr> <tr> <td>    1.1.10</td> <td>Ambient Conditions: AMB</td> <td>21</td> </tr> <tr> <td>    1.1.11</td> <td>Driver's Identification: DI</td> <td>22</td> </tr> <tr> <td>    1.1.12</td> <td>Fuel Economy: LFE</td> <td>23</td> </tr> <tr> <td>    1.1.13</td> <td>Air Supply Pressure : AIR1</td> <td>24</td> </tr> <tr> <td>    1.1.14</td> <td>High Resolution Fuel Consumption (Liquid): HRLFC</td> <td>25</td> </tr> <tr> <td>    1.1.15</td> <td>Aftertreatment 1 Diesel Exhaust Fluid Tank 1 Information: AT1T1I</td> <td>26</td> </tr> <tr> <td>    1.1.16</td> <td>FMS Tell Tale Status: FMS1</td> <td>27</td> </tr> <tr> <td>    1.1.17</td> <td>Electronic Brake Controller 1: EBC1</td> <td>31</td> </tr> <tr> <td>    1.1.18</td> <td>Electronic Engine Controller 14: EEC14</td> <td>32</td> </tr> <tr> <td>    1.1.19</td> <td>Fuel Consumption (Gaseous): GFC</td> <td>34</td> </tr> <tr> <td>    1.1.20</td> <td>Electronic Retarder Controller 1: ERC1</td> <td>35</td> </tr> <tr> <td>  <b>1.2</b></td> <td><b>Parameters for Truck FMS-Standard</b></td> <td><b>36</b></td> </tr> <tr> <td>    1.2.1</td> <td>Cruise Control/Vehicle Speed 1: CCVS1</td> <td>36</td> </tr> <tr> <td>    1.2.2</td> <td>Electronic Engine Controller #2: EEC2</td> <td>38</td> </tr> <tr> <td>    1.2.3</td> <td>Vehicle Weight: VW</td> <td>39</td> </tr> <tr> <td>    1.2.4</td> <td>Service Information: SERV</td> <td>41</td> </tr> <tr> <td>    1.2.5</td> <td>PTO Drive Engagement: PTODE</td> <td>42</td> </tr> <tr> <td>    1.2.6</td> <td>Combination Vehicle Weight: CVW</td> <td>43</td> </tr> <tr> <td>  <b>1.3</b></td> <td><b>Parameters for Bus FMS-Standard</b></td> <td><b>44</b></td> </tr> <tr> <td>    1.3.1</td> <td>Cruise Control/Vehicle Speed: CCVS</td> <td>44</td> </tr> <tr> <td>    1.3.2</td> <td>Electronic Engine Controller #2 : EEC2</td> <td>46</td> </tr> <tr> <td>    1.3.3</td> <td>Door Control 1: DC1</td> <td>47</td> </tr> <tr> <td>    1.3.4</td> <td>Door Control 2: DC2</td> <td>48</td> </tr> </table>						<b>1</b>	<b>PARAMETERS FOR FMS GATEWAY (ACCORDING SAE J1939)</b>	<b>10</b>	<b>1.1</b>	<b>Parameters for Bus and Truck FMS-Standard</b>	<b>10</b>	1.1.1	Fuel Consumption: LFC	10	1.1.2	Dash Display 1: DD1	11	1.1.3	Electronic Engine Controller #1: EEC1	12	1.1.4	Engine Hours, Revolutions: HOURS	13	1.1.5	Vehicle Identification: VI	14	1.1.6	FMS-standard Interface Identity / Capabilities: FMS	15	1.1.7	High Resolution Vehicle Distance: VDHR	17	1.1.8	Tachograph : TCO1	18	1.1.9	Engine Temperature 1: ET1	20	1.1.10	Ambient Conditions: AMB	21	1.1.11	Driver's Identification: DI	22	1.1.12	Fuel Economy: LFE	23	1.1.13	Air Supply Pressure : AIR1	24	1.1.14	High Resolution Fuel Consumption (Liquid): HRLFC	25	1.1.15	Aftertreatment 1 Diesel Exhaust Fluid Tank 1 Information: AT1T1I	26	1.1.16	FMS Tell Tale Status: FMS1	27	1.1.17	Electronic Brake Controller 1: EBC1	31	1.1.18	Electronic Engine Controller 14: EEC14	32	1.1.19	Fuel Consumption (Gaseous): GFC	34	1.1.20	Electronic Retarder Controller 1: ERC1	35	<b>1.2</b>	<b>Parameters for Truck FMS-Standard</b>	<b>36</b>	1.2.1	Cruise Control/Vehicle Speed 1: CCVS1	36	1.2.2	Electronic Engine Controller #2: EEC2	38	1.2.3	Vehicle Weight: VW	39	1.2.4	Service Information: SERV	41	1.2.5	PTO Drive Engagement: PTODE	42	1.2.6	Combination Vehicle Weight: CVW	43	<b>1.3</b>	<b>Parameters for Bus FMS-Standard</b>	<b>44</b>	1.3.1	Cruise Control/Vehicle Speed: CCVS	44	1.3.2	Electronic Engine Controller #2 : EEC2	46	1.3.3	Door Control 1: DC1	47	1.3.4	Door Control 2: DC2	48
<b>1</b>	<b>PARAMETERS FOR FMS GATEWAY (ACCORDING SAE J1939)</b>	<b>10</b>																																																																																																									
<b>1.1</b>	<b>Parameters for Bus and Truck FMS-Standard</b>	<b>10</b>																																																																																																									
1.1.1	Fuel Consumption: LFC	10																																																																																																									
1.1.2	Dash Display 1: DD1	11																																																																																																									
1.1.3	Electronic Engine Controller #1: EEC1	12																																																																																																									
1.1.4	Engine Hours, Revolutions: HOURS	13																																																																																																									
1.1.5	Vehicle Identification: VI	14																																																																																																									
1.1.6	FMS-standard Interface Identity / Capabilities: FMS	15																																																																																																									
1.1.7	High Resolution Vehicle Distance: VDHR	17																																																																																																									
1.1.8	Tachograph : TCO1	18																																																																																																									
1.1.9	Engine Temperature 1: ET1	20																																																																																																									
1.1.10	Ambient Conditions: AMB	21																																																																																																									
1.1.11	Driver's Identification: DI	22																																																																																																									
1.1.12	Fuel Economy: LFE	23																																																																																																									
1.1.13	Air Supply Pressure : AIR1	24																																																																																																									
1.1.14	High Resolution Fuel Consumption (Liquid): HRLFC	25																																																																																																									
1.1.15	Aftertreatment 1 Diesel Exhaust Fluid Tank 1 Information: AT1T1I	26																																																																																																									
1.1.16	FMS Tell Tale Status: FMS1	27																																																																																																									
1.1.17	Electronic Brake Controller 1: EBC1	31																																																																																																									
1.1.18	Electronic Engine Controller 14: EEC14	32																																																																																																									
1.1.19	Fuel Consumption (Gaseous): GFC	34																																																																																																									
1.1.20	Electronic Retarder Controller 1: ERC1	35																																																																																																									
<b>1.2</b>	<b>Parameters for Truck FMS-Standard</b>	<b>36</b>																																																																																																									
1.2.1	Cruise Control/Vehicle Speed 1: CCVS1	36																																																																																																									
1.2.2	Electronic Engine Controller #2: EEC2	38																																																																																																									
1.2.3	Vehicle Weight: VW	39																																																																																																									
1.2.4	Service Information: SERV	41																																																																																																									
1.2.5	PTO Drive Engagement: PTODE	42																																																																																																									
1.2.6	Combination Vehicle Weight: CVW	43																																																																																																									
<b>1.3</b>	<b>Parameters for Bus FMS-Standard</b>	<b>44</b>																																																																																																									
1.3.1	Cruise Control/Vehicle Speed: CCVS	44																																																																																																									
1.3.2	Electronic Engine Controller #2 : EEC2	46																																																																																																									
1.3.3	Door Control 1: DC1	47																																																																																																									
1.3.4	Door Control 2: DC2	48																																																																																																									



<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>		Page  <b>9 (61)</b>
Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>			Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>
Subject  <b>FMS-Standard description</b>					
<b>1.3.5</b>	<b>Time / Date : TD</b>				<b>49</b>
<b>1.3.6</b>	<b>Alternator Speed : AS</b>				<b>50</b>
<b>1.3.7</b>	<b>Electronic Transmission Controller 2 : ETC2</b>				<b>51</b>
<b>1.3.8</b>	<b>Air Suspension Control 4 : ASC4</b>				<b>52</b>
<b>1.3.9</b>	<b>Vehicle Electrical Power #4 : VEP4</b>				<b>53</b>
<b>1.3.10</b>	<b>Vehicle Dynamic Stability Control 2 : VDC2</b>				<b>54</b>
<b>2</b>	<b>EXAMPLES .....</b>				<b>55</b>
<b>2.1</b>	<b>Broadcast Announce Message (BAM) for Vehicle ID longer than 8 Byte .....</b>				<b>55</b>
<b>2.2</b>	<b>Example SW Identification for buses and/or trucks .....</b>				<b>57</b>
<b>2.3</b>	<b>Example FMS Tell Tale Status .....</b>				<b>58</b>
<b>3</b>	<b>OVERVIEW MESSAGES .....</b>				<b>60</b>

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>10 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

# 1 Parameters for FMS gateway (according SAE J1939)

always MSB (Most Significant BIT) First

## 1.1 Parameters for Bus and Truck FMS-Standard

### 1.1.1 Fuel Consumption: LFC

<b>0x00FEE9</b>								<b>PGN Hex</b>
<b>65,257</b>								<b>PGN</b>
<b>1000 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
				8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	Bit No
Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Engine total fuel used 0,5 L / Bit gain 0 L offset  SPN 250	Engine total fuel used 0,5 L / Bit gain 0 L offset  SPN 250	Engine total fuel used 0,5 L / Bit gain 0 L offset  SPN 250	Engine total fuel used 0,5 L / Bit gain 0 L offset  SPN 250	Name values values  SPN

**Description acc. SAE J 1939:**

**Total Fuel Used:** Accumulated amount of fuel used during vehicle operation.

**Additional comment:**

Calculated values given as indications, not as contractual values.

Might be set to “not available” if the High Resolution Fuel Consumption is available

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>11 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject **FMS-Standard description**

### 1.1.2 Dash Display 1: DD1

<b>0x00FEFC</b>								<b>PGN Hex</b>		
<b>65,276</b>								<b>PGN</b>		
<b>1000 ms</b>								<b>Rep. Rate</b>		
Data Byte 1	Data Byte 2		Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7		Data Byte 8	Byte No
	8	7	6	5	4	3	2	1		Bit No
Not used for (Bus) FMS-Standard	<b>Fuel Level 1</b> <b>0,4 % / Bit gain</b> <b>0 % offset</b>  <b>SPN 96</b>		Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	<b>Fuel Level 2</b> <b>0,4 % / Bit gain</b> <b>0 % offset</b>  <b>SPN 38</b>		Not used for (Bus) FMS-Standard	<b>Name values</b> <b>values</b>  <b>SPN</b>

#### Description acc. SAE J 1939:

**Fuel Level:** Ratio of volume of fuel to the total volume of fuel storage container.

When Fuel Level 2 (SPN 38) is not used, Fuel Level 1 (SPN 96) represents the total fuel in all fuel storage containers.

When Fuel Level 2 is used, Fuel Level 1 represents the fuel level in the primary or left-side fuel storage container.

#### Additional comment:

Fuel Level 2 is only used if different fuel types in different storage container

Fuel Level 1 represents always the fuel used for driving without indication of the location of the storage container.

Fuel Level 2 is not indicating the location of the storage container

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>12 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.3 Electronic Engine Controller #1: EEC1

<b>0x00F004</b>								<b>PGN Hex</b>																					
<b>61,444</b>								<b>PGN</b>																					
<b>20 ms</b>								<b>Rep. Rate</b>																					
Data Byte 1	Data Byte 2	Data Byte 3				Data Byte 4				Data Byte 5				Data Byte 6	Data Byte 7	Data Byte 8	Byte No												
		8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1				<b>Bit No</b>
Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	<b>Actual Engine – Percent Torque</b> 1 % / Bit -125 % offset  <b>SPN 513</b>				<b>Engine speed</b> 0.125 rpm / Bit gain 0 rpm offset  <b>SPN 190</b>				<b>Engine speed</b> 0.125 rpm / Bit gain 0 rpm offset  <b>SPN 190</b>				Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Name Name values values values SPN												

**Description acc. SAE J 1939:**

**Actual Engine – Percent Torque:** The calculated output torque of the engine. The data is transmitted in indicated torque as a percent of reference engine torque (see the engine configuration message, PGN 65251).

The engine percent torque value will not be less than zero and it includes the torque developed in the cylinders required to overcome friction.

**Engine Speed:** Actual engine speed which is calculated over a minimum crankshaft angle of 720 degrees divided by the number of cylinders.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>13 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject **FMS-Standard description**

### 1.1.4 Engine Hours, Revolutions: HOURS

<b>0x00FEE5</b>								PGN Hex																				
<b>65,253</b>								PGN																				
<b>1000 ms</b>								Rep. Rate																				
Data Byte 1		Data Byte 2		Data Byte 3		Data Byte 4		Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No																
8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1					Bit No
Engine total hours of Operation		Engine total hours of Operation		Engine total hours of Operation		Engine total hours of Operation		Not used for (Bus) FMS-Standard		Not used for (Bus) FMS-Standard		Not used for (Bus) FMS-Standard		Not used for (Bus) FMS-Standard		Name												
0.05 h / Bit gain 0 h offset		0.05 h / Bit gain 0 h offset		0.05 h / Bit gain 0 h offset		0.05 h / Bit gain 0 h offset										values values values												
SPN 247		SPN 247		SPN 247		SPN 247										SPN												

**Description acc. SAE J 1939:**

**Engine total hours of Operation:** Accumulated time of operation of engine.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal  
Counter is Engine running dependant

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>14 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.5 Vehicle Identification: VI

<b>0x00FEEC</b>								<b>PGN Hex</b>
<b>65,260</b>								<b>PGN</b>
<b>10.000 ms</b>								<b>Rep. Rate</b>
<b>Variable 1-n</b>	<b>Variable 1-n</b>	<b>Variable 1-n</b>	<b>Variable 1-n</b>	<b>Variable 1-n</b>	<b>Variable 1-n</b>	<b>Variable 1-n</b>	<b>Variable 1-n</b>	<b>Byte No</b>
								<b>Bit No</b>
<b>Vehicle identification number</b> <b>ASCII</b> <b>up to 200 characters</b> <b>* = Delimiter</b>  <b>SPN 237</b>	<b>Vehicle identification number</b> <b>ASCII</b> <b>up to 200 characters</b> <b>* = Delimiter</b>  <b>SPN 237</b>	<b>Vehicle identification number</b> <b>ASCII</b> <b>up to 200 characters</b> <b>* = Delimiter</b>  <b>SPN 237</b>	<b>Vehicle identification number</b> <b>ASCII</b> <b>up to 200 characters</b> <b>* = Delimiter</b>  <b>SPN 237</b>	<b>Vehicle identification number</b> <b>ASCII</b> <b>up to 200 characters</b> <b>* = Delimiter</b>  <b>SPN 237</b>	<b>Vehicle identification number</b> <b>ASCII</b> <b>up to 200 characters</b> <b>* = Delimiter</b>  <b>SPN 237</b>	<b>Vehicle identification number</b> <b>ASCII</b> <b>up to 200 characters</b> <b>* = Delimiter</b>  <b>SPN 237</b>	<b>Vehicle identification number</b> <b>ASCII</b> <b>up to 200 characters</b> <b>* = Delimiter</b>  <b>SPN 237</b>	<b>Name</b>  <b>values</b> <b>values</b> <b>values</b>  <b>SPN</b>

**Description acc. SAE J 1939:**

**Vehicle identification number:** Vehicle Identification Number (VIN) as assigned by the vehicle manufacturer. NOTE The ASCII character "\*" is reserved as a delimiter.

**Annotations:**

- 1) If the Vehicle ID is up to 8 Bytes (including) then it is broadcasted with PGN 00FEEC containing the vehicle ID and filled with "FF" at the unused bytes.
- 2) If the Vehicle ID contains more than 8 Bytes then a TP.CM (PGN 00EC00) with a minimum of two TP.DT (PGN 00EB00) will be used.

Information might be a sub-set of the full VIN. ie: only last 8 bytes are sent  
see example 2.1

**Additional comment:**

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>15 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.6 FMS-standard Interface Identity / Capabilities: FMS

<b>0x00FDD1</b>								PGN Hex																														
<b>64,977</b>								PGN																														
<b>10.000 ms</b>								Rep. Rate																														
Data Byte 1		Data Byte 2		Data Byte 3		Data Byte 4		Data Byte 5		Data Byte 6	Data Byte 7	Data Byte 8	Byte No																									
8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1							Bit No
Reserved for (Bus) FMS-Standard		SW-version supported Version number in the format ab.cd where this byte represents "a" ASCII  SPN 2806		SW-version supported Version number in the format ab.cd where this byte represents "b" ASCII  SPN 2806		SW-version supported Version number in the format ab.cd where this byte represents "c" ASCII  SPN 2806		SW-version supported Version number in the format ab.cd where this byte represents "d" ASCII  SPN 2806		Reserved for (Bus) FMS-Standard		Reserved for (Bus) FMS-Standard		Reserved for (Bus) FMS-Standard		Name values values values values	SPN																					
		Requests supported 00 = request is not supported 01= request is supported 10 = reserved 11 = don't care  SPN 2805																				Name values values values values	SPN															
Diagnostics supported 00 = diagnostics is not supported 01 = diagnostics is supported 10 = reserved 11 = don't care  SPN 2804																										Name values values values values	SPN											

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document <p style="text-align: center;"><b>FMS-Standard</b></p>		Page <p style="text-align: center;"><b>16 (61)</b></p>	
Issuer (dept., name, phone, sign) <p style="text-align: center;"><b>ACEA Task Force HDEI/BCEI</b></p>			Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
Subject <p style="text-align: center;"><b>FMS-Standard description</b></p>						
<p><b><u>Description acc. SAE J 1939:</u></b>  Information which specifies the capabilities of the Fleet Management System (FMS) - standard interface device.  This PGN typically is sourced from the network interconnect FMS - standard interface device.  <b>Requests supported:</b> Status signal which indicates if the FMS Vehicle Interface (FMS Gateway) will respond to requests from the FMS device for the PGNs listed in the FMS Interface Specification.  This mode is to support FMS gateway devices that only operate in a 'Request' mode.  The FMS PGNs may also be broadcast periodically in this mode.  The FMS Gateway will NOT support the requests for information not included in the FMS Interface Specification onto the vehicle network..  <b>Diagnostics supported:</b> Status signal which indicates if the FMS Vehicle Interface (FMS Gateway) supports the handling of diagnostic messages from the vehicle network onto the FMS network.  The FMS gateway does NOT support the re-broadcast of diagnostics messages present on the vehicle network.  If this 'FMS-standard Diagnostics Supported' feature is supported by the FMS Gateway, the FMS Gateway will support the requests for diagnostics information (from the FMS device) onto the vehicle network and pass the responses onto the FMS network.  Note: This feature of the FMS Gateway is independent of the 'FMS-standard Requests Supported'. The FMS Gateway may support diagnostics without supporting the 'FMS-standard Requests Supported' function, or visa-versa..  <b>FMS-standard SW-version supported:</b> Information that identifies which issue level of the FMS-standard document the software included in the FMS gateway supports. Four bytes, representing ab.cd type revision level identification.  Version number in the format ab.cd where byte2 and 3 represent the version number for trucks “ab” (ASCII)  Byte 4 and 5 represent the version for buses and coaches “cd”(ASCII)  “00” represents “not supported”  For example, FMS-standard version 02.06 means the fms gateway supports version 02 of truck fms-standard and version 06 of bus fms-standard.</p> <p><b><u>Additional comment:</u></b>  See example 2.2</p>						



<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>17 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.7 High Resolution Vehicle Distance: VDHR

<b>0x00FEC1</b>								<b>PGN Hex</b>																																
<b>65,217</b>								<b>PGN</b>																																
<b>1000 ms</b>								<b>Rep. Rate</b>																																
<b>Data Byte 1</b>		<b>Data Byte 2</b>		<b>Data Byte 3</b>		<b>Data Byte 4</b>		<b>Data Byte 5</b>	<b>Data Byte 6</b>	<b>Data Byte 7</b>	<b>Data Byte 8</b>	<b>Byte No</b>																												
8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	<b>Bit No</b>
<b>High resolution total vehicle distance</b>		<b>High resolution total vehicle distance</b>		<b>High resolution total vehicle distance</b>		<b>High resolution total vehicle distance</b>		<b>Not used for (Bus) FMS-Standard</b>	<b>Not used for (Bus) FMS-Standard</b>	<b>Not used for (Bus) FMS-Standard</b>	<b>Not used for (Bus) FMS-Standard</b>	<b>Name</b>																												
<b>5 m / Bit gain</b>		<b>5 m / Bit gain</b>		<b>5 m / Bit gain</b>		<b>5 m / Bit gain</b>						<b>values</b>																												
<b>0 m offset</b>		<b>0 m offset</b>		<b>0 m offset</b>		<b>0 m offset</b>						<b>values</b>																												
<b>SPN 917</b>		<b>SPN 917</b>		<b>SPN 917</b>		<b>SPN 917</b>						<b>values</b>																												
<b>SPN 917</b>		<b>SPN 917</b>		<b>SPN 917</b>		<b>SPN 917</b>						<b>SPN</b>																												

**Description acc. SAE J 1939:**

**High resolution total vehicle distance:** Accumulated distance travelled by the vehicle during its operation.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>18 (61)</b>
Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>			Date <b>17.09.2021</b>	Approved <b>Final</b>
			Issue <b>Version 04</b>	Reg. no.

Subject **FMS-Standard description**

### 1.1.8 Tachograph : TCO1

<b>0x00FE6C</b>								PGN Hex
<b>65,132</b>								PGN
<b>20 ms/ 50 ms</b>								Rep. Rate
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1			8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	Bit No.
<b>Vehicle motion</b> 00 = Vehicle motion not detected 01 = vehicle motion detected  SPN 1611	<b>Vehicle Overspeed</b> 00 = No overspeed 01 = Overspeed  SPN 1614	Not used for (Bus) FMS-Standard could be sent as "not available" or "don't care"	<b>Direction indicator</b> 00 = Forward 01 = Reverse  SPN 1619	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	<b>Tachogr. vehicle speed</b> 1/256 km/h Bit gain 0 km/h offset  SPN 1624	<b>Tachogr. Vehicle speed</b> 1/256 km/h Bit gain 0 km/h offset  SPN 1624	Name values values values values values  SPN
<b>Driv. 2 working state</b> 000 = Rest 001 = Driver available 010 = Work 011 = Drive 110 = Error 111 = not available  SPN 1613	<b>Driver 1 card</b> 00 = Card not present 01= Card present  SPN 1615	<b>Driver 2 card</b> 00 = Card not present 01= Card present  SPN 1616	<b>Tachgraph performance</b> 00 = Normal performance 01 = Performance analysis  SPN 1620					Name values values values values values values values  SPN
<b>Driv. 1 working state</b> 000 = Rest 001 = Driver available 010 = Work 011 = Drive 110 = Error 111 = not available  SPN 1612	<b>Driv. 1 time rel states</b> 0000 = normal 0001 = 15 min bef. 4 ½ h 0010 = 4 ½ h reached 0011 = 15 min bef. 9 h 0100 = 9 h reached 0101 = 15 min bef. 16 h 0110 = 16h reached 1110 = Error 1111 = not available  SPN 1617	<b>Driv 2 time rel. states</b> 0000 = normal 0001 = 15 min bef. 4 ½ h 0010 = 4 ½ h reached 0011 = 15 min before 9 h 0100 = 9 h reached 0101 = 15 min bef. 16 h 0110 = 16h reached 1110 = Error 1111 = not available  SPN 1618	<b>Handling information</b> 00 = no handling information 01 = handling information  SPN 1621					Name values values values values values values values  SPN
			<b>System event</b> 00 = no tachogr. Event 01 = tachogr. Event  SPN 1622					Name values values  SPN

<p align="center"> <b>Daimler AG</b>  <b>Daimler Buses-EvoBus GmbH</b>  <b>MAN Truck &amp; Bus AG</b>  <b>Scania AB</b> </p>	<p align="center"> <b>Scania CV</b>  <b>Volvo Truck Corporation</b>  <b>Volvo Bus Corporation</b>  <b>Renault Trucks</b> </p>	<p align="center"> <b>CNH Industrial</b>  <b>DAF Trucks N.V.</b>  <b>VDL Bus &amp; Coach B.V.</b> </p>	<p align="center">Name of document</p> <p align="center"><b>FMS-Standard</b></p>		<p align="center">Page</p> <p align="center"><b>19 (61)</b></p>	
<p>Issuer (dept., name, phone, sign)</p> <p align="center"><b>ACEA Task Force HDEI/BCEI</b></p>			<p>Date</p> <p><b>17.09.2021</b></p>	<p>Approved</p> <p align="center"><b>Final</b></p>	<p>Issue</p> <p align="center"><b>Version 04</b></p>	<p>Reg. no.</p>
<p>Subject</p> <p align="center"><b>FMS-Standard description</b></p>						
<p><b><u>Description acc. SAE J 1939:</u></b></p> <p><b>Vehicle motion:</b> Indicates whether motion of the vehicle is detected or not.</p> <p><b>Driver 2 Working State:</b> State of work of the driver.</p> <p><b>Driver 1 Working State:</b> State of work of the driver.</p> <p><b>Vehicle Overspeed:</b> Indicates whether the vehicle is exceeding the legal speed limit set in the tachograph.</p> <p><b>Driver 1 Card:</b> Indicates the presence of a driver card.</p> <p><b>Driver 1 Time Related Status:</b> Indicates if the driver approaches or exceeds working time limits (or other limits).</p> <p><b>Driver 2 Card:</b> Indicates the presence of a driver card.</p> <p><b>Driver 2 Time Related Status:</b> Indicates if the driver approaches or exceeds working time limits (or other limits).</p> <p><b>Direction Indicator:</b> Indicates the direction of the vehicle.</p> <p><b>Tachograph Performance:</b> Indicates the tachograph performance; including electronic or mechanical analysis, instrument analysis, speed sensor analysis, mass storage analysis, and printer analysis.</p> <p><b>Handling Information:</b> Indicates that handling information is present. Information could include 'no printer paper', 'no driver card', etc.</p> <p><b>System Event:</b> Indicates that a tachograph event has occurred. This may include power supply interruption, interruption of the speed sensor, incorrect data on the driver card, driving without a driver card, illegal removal of a driver card, insertion of a driver card during driving, and time adjustment.</p> <p><b>Tachograph Vehicle Speed:</b> Speed of the vehicle registered by the tachograph.</p> <p><b><u>Additional comment:</u></b></p> <p>Tachograph vehicle speed might differ from the wheel based speed</p> <p>The availability of the value direction indicator (SPN 1619) is tachograph dependant.</p> <p>At the issuing date of this document the tachographs are not supporting this value.</p> <p>Only available if a digital tachograph is present</p>						

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>20 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject **FMS-Standard description**

### 1.1.9 Engine Temperature 1: ET1

<b>0x00FEEE</b>								PGN Hex	
<b>65,262</b>								PGN	
<b>1000 ms</b>								Rep. Rate	
Data Byte 1		Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
8	7	6	5	4	3	2	1		Bit No
<b>Engine coolant temperature</b>  1 °C / Bit gain - 40 °C offset  SPN 110		Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Name  values values values  SPN

**Description acc. SAE J 1939:**

**Engine Coolant Temperature:** Temperature of liquid found in engine cooling system.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>21 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.10 Ambient Conditions: AMB

<b>0x00FEF5</b>								PGN Hex											
<b>65,269</b>								PGN											
<b>1000 ms</b>								Rep. Rate											
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4				Data Byte 5				Data Byte 6	Data Byte 7	Data Byte 8	Byte No					
			8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	Bit No
Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	<b>Ambient Air Temperature</b> 0.03125 °C / Bit gain - 273 °C offset  SPN 171				<b>Ambient Air Temperature</b> 0.03125 °C / Bit gain - 273 °C offset  SPN 171				Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Name Name values values values SPN					

**Description acc. SAE J 1939:**

**Ambient Air Temperature:** Temperature of air surrounding vehicle.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>22 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.11 Driver's Identification: DI

<b>0x00FE6B</b>								<b>PGN Hex</b>
<b>65,131</b>								<b>PGN</b>
<b>10000 ms</b>								<b>Rep. Rate</b>
Variable 1-n	Variable 1-n	Variable 1-n	Variable 1-n	Variable 1-n	Variable 1-n	Variable 1-n	Variable 1-n	Byte No
8-1	8 - 1	8 - 1	8-1	8 - 1	8 - 1	8 - 1	8 - 1	Bit No.
<b>Driver 1 identification Driver 2 identification</b>	<b>Driver 1 identification Driver 2 identification</b>	<b>Driver 1 identification Driver 2 identification</b>	<b>Driver 1 identification Driver 2 identification</b>	<b>Driver 1 identification Driver 2 identification</b>	<b>Driver 1 identification Driver 2 identification</b>	<b>Driver 1 identification Driver 2 identification</b>	<b>Driver 1 identification Driver 2 identification</b>	<b>Name Name values values values values SPN</b>
<b>SPN 1625/1626</b>	<b>SPN 1625/1626</b>	<b>SPN 1625/1626</b>	<b>SPN 1625/1626</b>	<b>SPN 1625/1626</b>	<b>SPN 1625/1626</b>	<b>SPN 1625/1626</b>	<b>SPN 1625/1626</b>	

**Description acc. SAE J 1939:**

Field: a Driver 1 Identification Delimiter (ASCII '\*') b Driver 2 Identification Delimiter (ASCII '\*')  
 NOTE - If only driver card 1 is present, only the parameter driver 1 identification and two delimiters shall be transmitted.  
 If only driver card 2 is present, a delimiter followed by parameter driver 2 identification and the second delimiter shall be transmitted.  
 If no driver cards are present, only the two delimiters shall be sent."

**Additional comment:**

The driver ID is only available if a digital tachograph is present.  
 Driver ID = Issuing member state + CardNumber = 3 + 16 Byte (acc. ISO 16844)  
 If a driver ID is available the message is sent with a Broadcast Announce Message (BAM)  
 If no driver cards are present then it is broadcasted with PGN 00FE6B (8Byte) containing two delimiters and filled with "FF" at the unused bytes.  
 Difference to SAE: broadcast instead of on request  
 The information is sent by the tachograph. Depending on the tachograph brand the information is not immediately available after insertion of the driver card.

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>23 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.12 Fuel Economy: LFE

<b>0x00FEF2</b>								PGN Hex
<b>65,266</b>								PGN
<b>100 ms</b>								Rep. Rate
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
8   7   6   5   4   3   2   1	8   7   6   5   4   3   2   1	8   7   6   5   4   3   2   1	8   7   6   5   4   3   2   1					Bit No.
<b>Fuel Rate</b>  0.05 L/h per bit 0 offset 0 to 3,212.75 L/h  SPN 183	<b>Fuel Rate</b>  0.05 L/h per bit 0 offset 0 to 3,212.75 L/h  SPN 183	<b>Instantaneous Fuel Economy</b>  1/512 km/L per bit 0 offset 0 to 125,5 km/L  SPN 184	<b>Instantaneous Fuel Economy</b>  1/512 km/L per bit 0 offset 0 to 125,5 km/L  SPN 184	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Name Name values values values values SPN

**Description acc. SAE J 1939:**

**Fuel rate:** Amount of fuel consumed by engine per unit of time

**Instantaneous Fuel Economy:** Current fuel economy at current vehicle velocity

**Additional comment:**

Calculated values given as indications, not as contractual values.

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>24 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.13 Air Supply Pressure : AIR1

<b>0x00FEAE</b>								<b>PGN Hex</b>
<b>65,198</b>								<b>PGN</b>
<b>1000 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
		8   7   6   5   4   3   2   1	8   7   6   5   4   3   2   1					<b>Bit No.</b>
Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	<b>Service Brake Air Pressure Circuit #1</b> 8 kPa/Bit 0 offset  SPN 1087	<b>Service Brake Air Pressure Circuit #2</b> 8 kPa/Bit 0 offset  SPN 1088	Not used for (Bus) FMS- Standard	Not used for (Bus) FMS- Standard	Not used for (Bus) FMS- Standard	Not used for (Bus) FMS- Standard	<b>Name</b> <b>values</b> <b>values</b> <b>values</b> <b>values</b> SPN

**Description acc. SAE J 1939:**

**Service Brake Air Pressure Circuit #1:** The pneumatic pressure in the service brake circuit or reservoir #1.  
**Service Brake Air Pressure Circuit #2:** The pneumatic pressure in the service brake circuit or reservoir #2.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal



<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>25 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.14 High Resolution Fuel Consumption (Liquid): HRLFC

<b>0x00FD09</b>								PGN Hex
<b>64,777</b>								PGN
<b>1000 ms</b>								Rep. Rate
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
				Bit 8 - 1	Bit 8 - 1	Bit 8 - 1	Bit 8 - 1	Bit No.
Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	High resolution engine total fuel used  0.001 L/bit 0 offset 0 to 4,211,081.215 L  SPN 5054	High resolution engine total fuel used  0.001 L/bit 0 offset 0 to 4,211,081.215 L  SPN 5054	High resolution engine total fuel used  0.001 L/bit 0 offset 0 to 4,211,081.215 L  SPN 5054	High resolution engine total fuel used  0.001 L/bit 0 offset 0 to 4,211,081.215 L  SPN 5054	Name Name values values values values SPN

**Description acc. SAE J 1939:**

Engine fuel consumption accumulators

High resolution engine total fuel used: Accumulated amount of fuel used during vehicle operation. High resolution used for calculations and fleet management systems.

**Additional comment:**

Is implemented if technical possible

Calculated values given as indications, not as contractual values.

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>26 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.15 Aftertreatment 1 Diesel Exhaust Fluid Tank 1 Information: AT1T1l

<b>0x00FE56</b>								<b>PGN Hex</b>												
<b>65,110</b>								<b>PGN</b>												
<b>1000 ms</b>								<b>Rep. Rate</b>												
Data Byte 1		Data Byte 2		Data Byte 3		Data Byte 4		Data Byte 5		Data Byte 6		Data Byte 7		Data Byte 8		Byte No				
8	7	6	5	4	3	2	1									<b>Bit No</b>				
<b>Aftertreatment 1</b> <b>Diesel Exhaust Fluid</b> <b>Tank 1 Level</b> <b>0 % = Empty</b> <b>100% = Full</b> <b>0.4 %/bit,</b> <b>0 offset</b>  <b>SPN 1761</b>								Not used for (Bus) FMS-Standard		Not used for (Bus) FMS-Standard		Not used for (Bus) FMS-Standard		Not used for (Bus) FMS-Standard		Not used for (Bus) FMS-Standard		Not used for (Bus) FMS-Standard		<b>Name</b>
																values				
																values				
																values				
																values				
																SPN				

**Description acc. SAE J 1939:**

Ratio of volume of diesel exhaust fluid to the total volume of diesel exhaust fluid storage container.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal

**Subject**  
**FMS-Standard description**

**1.1.16 FMS Tell Tale Status: FMS1**

<b>0x00FD7D</b>								PGN Hex
<b>64,893</b>								PGN
<b>1000 ms</b>								Rep. Rate
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	Bit No.
<b>Telltale Block ID</b> see table for Block ID and Telltale ID  1111 = don't care	<b>Telltale Status 2</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 4</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 6</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 8</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 10</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 12</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 14</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	Name values values values values values
<b>Telltale Status 1</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 3</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 5</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 7</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 9</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 11</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 13</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	<b>Telltale Status 15</b> 000 = off 001 = Cond. Red 010 = Cond. Yellow 011 = Cond. Info 100-110 = Reserved 111 = not available	Name values values values values values
Not defined (set to "1")	Not defined (set to "1")	Not defined (set to "1")	Not defined (set to "1")	Not defined (set to "1")	Not defined (set to "1")	Not defined (set to "1")	Not defined (set to "1")	Name values values values values

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>28 (61)</b>
Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>			Date <b>17.09.2021</b>	Approved <b>Final</b>
			Issue <b>Version 04</b>	Reg. no.

Subject  
**FMS-Standard description**

**Table for Telltale status:**

Block ID	Telltale Status	Telltale ID	ISO No.	Name	Mandatory Truck only	Block ID	Telltale Status	Telltale ID	ISO No.	Name	Mandatory Truck only
0	1	1	27	Cooling air conditioning		2	1	31	2441	Steering failure	
0	2	2	82	High beam, main beam		2	2	32	2461	Height Control (Levelling)	
0	3	3	83	Low beam, dipped beam		2	3	33	2574	Retarder	
0	4	4	84	Turn signals		2	4	34	2596	Engine Emission system failure (Mil indicator)	
0	5	5	85	Hazard warning		2	5	35	2630	ESC indication	
0	6	6	100	Provision for the disabled or handicapped persons		2	6	36	no	Brake lights	
0	7	7	238	Parking Brake	X	2	7	37	no	Articulation	
0	8	8	239	Brake failure/brake system malfunction		2	8	38	no	Stop Request	
0	9	9	242	Hatch open		2	9	39	no	Pram request	
0	10	10	245	Fuel level	X	2	10	40	no	Bus stop brake	
0	11	11	246	Engine coolant temperature	X	2	11	41	2946	AdBlue level	
0	12	12	247	Battery charging condition		2	12	42	no	Raising	
0	13	13	248	Engine oil	X	2	13	43	no	Lowering	
0	14	14	456	Position lights,side lights		2	14	44	no	Kneeling	
0	15	15	633	Front fog light		2	15	45	no	Engine compartment temperature	
1	1	16	634	Rear fog light		3	1	46	no	Auxillary air pressure	
1	2	17	637	Park Heating		3	2	47	2432	Air filter clogged	
1	3	18	640	Engine / Mil indicator	X	3	3	48	2452	Fuel filter differential pressure	
1	4	19	717	Service, call for maintenance		3	4	49	249	Seat belt	
1	5	20	1168	Transmission fluid temperature		3	5	50	no	EBS	
1	6	21	1396	Transmission failure/malfunction		3	6	51	2682	Lane departure indication	
1	7	22	1407	Anti-lock brake system failure		3	7	52	no	Advanced emergency braking system	
1	8	23	1408	Worn brake linings		3	8	53	2581	ACC	
1	9	24	1422	Windscreen washer fluid/windshield washer fluid		3	9	54	no	Trailer connected	
1	10	25	1434	Tire failure/malfunction		3	10	55	2444/2445	ABS Trailer 1,2	
1	11	26	1603	Malfunction/general failure		3	11	56	2108	Airbag	
1	12	27	2426	Engine oil temperature		3	12	57	no	EBS Trailer 1,2	
1	13	28	2427	Engine oil level		3	13	58	no	Tachograph indication	
1	14	29	2429	Engine coolant level		3	14	59	2649	ESC switched off	
1	15	30	2440	Steering fluid level		3	15	60	no	Lane departure warning switched off	



<p align="center"> <b>Daimler AG</b>  <b>Daimler Buses-EvoBus GmbH</b>  <b>MAN Truck &amp; Bus AG</b>  <b>Scania AB</b> </p>	<p align="center"> <b>Scania CV</b>  <b>Volvo Truck Corporation</b>  <b>Volvo Bus Corporation</b>  <b>Renault Trucks</b> </p>	<p align="center"> <b>CNH Industrial</b>  <b>DAF Trucks N.V.</b>  <b>VDL Bus &amp; Coach B.V.</b> </p>	<p align="center">Name of document</p> <p align="center"><b>FMS-Standard</b></p>		<p align="center">Page</p> <p align="center"><b>30 (61)</b></p>	
<p>Issuer (dept., name, phone, sign)</p> <p align="center"><b>ACEA Task Force HDEI/BCEI</b></p>			<p>Date</p> <p><b>17.09.2021</b></p>	<p>Approved</p> <p><b>Final</b></p>	<p>Issue</p> <p><b>Version 04</b></p>	<p>Reg. no.</p>
<p>Subject</p> <p align="center"><b>FMS-Standard description</b></p>						
<p><b><u>Annotations:</u></b></p> <p><b>Tell Tale Status:</b></p> <p>The Tell Tale Status information is derived from information displayed to the driver’s dashboard.  The tell tale number is related to the description in the ISO 7000 document.  The not related to ISO 7000 is stated with “no”  There are three possible conditions stated: Red (“R”), Yellow (“Y”), Info (“I”). The interpretation of the status is manufacturer dependant and might be different.  For details please refer to the manufacturers’ document.  The symbols used in the dash display of each manufacturer might vary from ISO symbols.  The lamp characteristic (e.g. flashing) is not reflected in the tell tale information.  The status information is present as long the status is valid.</p> <p><b><u>Additional comment:</u></b></p> <p>Due to the repetition rate of the message, it is not guaranteed to include all intermittent signals.*</p> <p>The message is mandatory for block 0-1 (for trucks) however some tell tale status information are not mandatory  Further blocks are optional  “skipping blocks” (e.g. if all tell tales of a block are not available) is allowed (e.g. sending block 0,1,4)</p> <p>see example in 2.3</p>						

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>31 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.17 Electronic Brake Controller 1: EBC1

<b>0x00F001</b>								<b>PGN Hex</b>							
<b>61,441</b>								<b>PGN</b>							
<b>100 ms</b>								<b>Rep. Rate</b>							
Data Byte 1	Data Byte 2							Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No	
	8	7	6	5	4	3	2	1						<b>Bit No.</b>	
Not used for (Bus) FMS-Standard	<b>Brake Pedal Position</b>  0,4 % / Bit gain 0 % offset  SPN 521							Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Name Name values values values values SPN

**Description acc. SAE J 1939:**

Ratio of brake pedal position to maximum pedal position.

Used for electric brake applications.

0% means no braking.

Also when there are two brake pedals on the machine (Left Brake Pedal Position SPN 3033 and Right Brake Pedal Position SPN 3032) the maximum of the two should be transmitted for Brake Pedal Position.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>32 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

**1.1.18 Electronic Engine Controller 14: EEC14**

<b>0x00FDC2</b>								<b>PGN Hex</b>
<b>64,962</b>								<b>PGN</b>
<b>10000 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
						8   7   6   5   4   3   2   1		<b>Bit No.</b>
Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	<b>Fuel Type</b>  <b>256 states/8 bit</b>  <b>SPN 5837</b>	Not used for (Bus) FMS-Standard	<b>Name Name values values</b>  <b>SPN</b>

**Description acc. SAE J 1939:**

Type of fuel currently being utilized by the vehicle

See table below



<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>33 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

Data Byte	Scaling	External Display	Data Byte	Scaling	External Display
0x00	Not available	NONE	0x10	Bi-fuel vehicle using battery and combustion engine	BI_MIX
0x01	Gasoline/petrol	GAS	0x11	Hybrid vehicle using gasoline engine	HYB_GAS
0x02	Methanol	METH	0x12	Hybrid vehicle using gasoline engine on ethanol	HYB_ETH
0x03	Ethanol	ETH	0x13	Hybrid vehicle using diesel engine	HYB_DSL
0x04	Diesel	DSL	0x14	Hybrid vehicle using battery	HYB_ELEC
0x05	Liquefied Petroleum Gas (LPG)	LPG	0x15	Hybrid vehicle using battery and combustion engine	HYB_MIX
0x06	Compressed Natural Gas (CNG)	CNG	0x16	Hybrid vehicle in regeneration mode	HYB_REG
0x07	Propane	PROP	0x17	Natural Gas (NG)	NG
0x08	Battery/electric	ELEC	0x18	Bi-fuel vehicle using NG	BI_NG
0x09	Bi-fuel vehicle using gasoline	BI_GAS	0x19	Bi-fuel using diesel	
0x0A	Bi-fuel vehicle using methanol	BI_METH	0x1A	Natural Gas (Compressed or Liquefied Natural Gas)	
0x0B	Bi-fuel vehicle using ethanol	BI_ETH	0x1B	Dual Fuel – Diesel and CNG	
0x0C	Bi-fuel vehicle using LPG	BI_LPG	0x1C	Dual Fuel – Diesel and LNG	
0x0D	Bi-fuel vehicle using CNG	BI_CNG	0x1D- 0xFD	ISO/SAE reserved	
0x0E	Bi-fuel vehicle using propane	BI_PROP	0xFE	Error	
0x0F	Bi-fuel vehicle using battery	BI_ELEC	0xFF	Not available (Parameter not supported)	

EXAMPLE: If a Bi-fuel vehicle has less than 10% ethanol in the gasoline/petrol, then the external test equipment shall display state 0x09. In such a case, the system would be using gasoline/petrol (fuel) tables and OBD thresholds. SPN 5458 should either artificially display 0% or some number 10% or less if the system has such resolution. If the ethanol in the gasoline/petrol is above 10%, then the external test equipment shall display state 0x0B. SPN 5458 shall report the calculated ethanol/alcohol percentage.

Note: "Not available" (Data 0x00) shall be used for the following conditions where no fuel is being utilized:

- Ignition Key On/Engine Off, for example, for bi-fuel vehicles when the vehicle cannot identify which fuel is being used before engine start
- Engine stopped for vehicle using Start/Stop strategy or for hybrid vehicle with engine stopped If FUEL\_TYP is utilized on a single fuel vehicle, it can continue to indicate the previously utilized fuel type while the engine is in Decel Fuel Cut Off (DFCO) mode. It is not required to indicate 0x00 while in DFCO.

Regarding fuel type 0x17 - Natural Gas - this applies to any type of natural gaseous fuel when the source (CNG, LPG, or other) is not relevant.

Regarding fuel type 0x18 - Bi-fuel vehicle using NG; this applies to bi-fuel vehicles running Diesel and Natural Gas, where the source of the natural gaseous fuel is not relevant.

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>34 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject **FMS-Standard description**

### 1.1.19 Fuel Consumption (Gaseous): GFC

<b>0x00FEAF</b>								<b>PGN Hex</b>
<b>65,199</b>								<b>PGN</b>
<b>1000 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
				Bit 8-1	Bit 8-1	Bit 8-1	Bit 8-1	Bit No.
Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	Not used for (Bus) FMS-Standard	<b>Total Fuel Used (Gaseous)</b> <b>0.5 kg/bit</b> <b>0 to 2,105,540,607.5 kg</b>  <b>SPN 1040</b>	<b>Total Fuel Used (Gaseous)</b> <b>0.5 kg/bit</b> <b>0 to 2,105,540,607.5 kg</b>  <b>SPN 1040</b>	<b>Total Fuel Used (Gaseous)</b> <b>0.5 kg/bit</b> <b>0 to 2,105,540,607.5 kg</b>  <b>SPN 1040</b>	<b>Total Fuel Used (Gaseous)</b> <b>0.5 kg/bit</b> <b>0 to 2,105,540,607.5 kg</b>  <b>SPN 1040</b>	<b>Name</b> <b>Name</b> <b>values</b> <b>values</b> <b>values</b> <b>values</b> <b>SPN</b>

**Description acc. SAE J 1939:**

Total fuel consumed (trip drive fuel + trip PTO governor moving fuel + trip PTO governor non-moving fuel + trip idle fuel) over the life of the engine.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>35 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.1.20 Electronic Retarder Controller 1: ERC1

<b>0x00F000</b>								<b>PGN Hex</b>																			
<b>61,440</b>								<b>PGN</b>																			
<b>100 ms</b>								<b>Rep. Rate</b>																			
Data Byte 1		Data Byte 2		Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No																	
8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1				8	7	6	5	4	3	2	1	<b>Bit No</b>
<b>Retarder Torque Mode</b>		<b>Actual Retarder - Percent Torque</b>		Not used for FMS-Standard		Not used for FMS-Standard		Not used for FMS-Standard		Not used for FMS-Standard		<b>Retarder Selection, non-engine</b>		Not used for FMS-Standard		<b>Name</b>											
16 states/4 bit, 0 offset		1 %/bit, -125 % offset										0.4 %/bit, 0 % offset				values											
SPN 900		SPN 520										SPN 1716				values											
Not used for FMS-Standard																SPN											

#### Description acc. SAE J 1939:

**Retarder Torque Mode:** State signal which indicates which retarder torque mode is currently generating, limiting, or controlling the torque.

Note that the modes are not in prioritized order. Not all modes may be relevant for a given device. Some devices may not implement all functions.

Mode 0000b means “No request”: retarder torque = 0 (no braking). See Appendix D in SAE documentation

Modes 0001b to 1110b indicate that there is either a torque request or the identified function is currently controlling the retarder:

retarder torque may range from 0 (no braking) to the upper limit.

**Actual Retarder - Percent Torque:** Actual braking torque of the retarder as a percent of retarder configuration reference torque SPN 556.

**Retarder Selection, non-engine:** The “Retarder Selection, non-engine” is the position of the driver’s selector for retarders that are not part of the engine system, expressed as percent and determined by the ratio of current position to the maximum possible position. The physical device may be a lever, rotary dial, combination of switches, or other device that the driver can use to select the type or amount of retardation needed.

#### Additional comment:

For SPN 1716: The value is related to the driver’s selection of a retarder (engine and/or drive line).

Subject  
**FMS-Standard description**

## 1.2 Parameters for Truck FMS-Standard

### 1.2.1 Cruise Control/Vehicle Speed 1: CCVS1

<b>0x00FEF1</b>								PGN Hex																								
<b>65,265</b>								PGN																								
<b>100 ms</b>								Rep. Rate																								
Data Byte 1		Data Byte 2		Data Byte 3		Data Byte 4		Data Byte 5	Data Byte 6	Data Byte 7		Data Byte 8	Byte No																			
8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	Bit No
Not used for FMS-Standard		Wheel based speed 1/256 km/h Bit gain 0 km/h offset  SPN 84		Wheel based speed 1/256 km/h Bit gain 0 km/h offset  SPN 84		Clutch switch 00 = pedal released 01 = pedal depressed  SPN 598		Not used for FMS-Standard	Not used for FMS-Standard	Cruise Control States 000 - Off/Disabled 001 - Hold 010 - Accelerate 011 - Decelerate 100 - Resume 101 - Set 110 - Accel. Override 111 - Not available SPN 527		Not used for FMS-Standard	Name values values values values values values values SPN																			
		Parking Brake Switch 00 = Parking brake not set 01 = Parking brake set SPN 70		Brake switch 00 = pedal released 01 = pedal depressed  SPN 597 Not used for FMS Standard		Cruise control active 00 = switched off 01 = switched on  SPN 595		PTO state 00000 = off/disabled 00101 = Set 11111 = not available  SPN 976		Name values values values SPN	Name values values values SPN																					

<p align="center"> <b>Daimler AG</b>  <b>Daimler Buses-EvoBus GmbH</b>  <b>MAN Truck &amp; Bus AG</b>  <b>Scania AB</b> </p>	<p align="center"> <b>Scania CV</b>  <b>Volvo Truck Corporation</b>  <b>Volvo Bus Corporation</b>  <b>Renault Trucks</b> </p>	<p align="center"> <b>CNH Industrial</b>  <b>DAF Trucks N.V.</b>  <b>VDL Bus &amp; Coach B.V.</b> </p>	<p align="center">Name of document</p> <p align="center"><b>FMS-Standard</b></p>		<p align="center">Page</p> <p align="center"><b>37 (61)</b></p>	
<p>Issuer (dept., name, phone, sign)</p> <p align="center"><b>ACEA Task Force HDEI/BCEI</b></p>			<p>Date</p> <p><b>17.09.2021</b></p>	<p>Approved</p> <p><b>Final</b></p>	<p>Issue</p> <p><b>Version 04</b></p>	<p>Reg. no.</p>
<p>Subject</p> <p align="center"><b>FMS-Standard description</b></p>						
<p><b><u>Description acc. SAE J 1939:</u></b></p> <p><b>Parking Brake Switch:</b> Switch signal which indicates when the parking brake is set. In general the switch actuated by the operator's park brake control, whether a pedal, lever or other control mechanism.</p> <p><b>Wheel Based Speed:</b> Speed of the vehicle as calculated from wheel or tailshaft speed.</p> <p><b>Clutch Switch:</b> Switch signal which indicates that the clutch pedal is being pressed. It is necessary for a safe drivetrain behaviour that the clutch switch is set before the clutch is opened (cruise control function).</p> <p><b>Brake Switch:</b> Switch signal which indicates that the driver operated brake foot pedal is being pressed. This brake foot pedal is controlling the vehicles' service brake (total vehicle braking application, not park brakes). It is necessary for safe drivetrain behaviour that the switch activates before the physical braking components are activated (i.e. Disengage the cruise control function prior to the activation of friction brakes).</p> <p><b>Cruise Control Active:</b> Cruise control is switched on. It is not ensured that the engine is controlled by cruise control, as in the case of a large driver's demand the engine is controlled by the driver while cruise control is active (maximum selection of cruise control and driver's demand). The cruise control is set to 0 if a switch off condition occurs.</p> <p><b>PTO state:</b> This parameter is used to indicate the current state or mode of operation by the power takeoff (PTO) device. It needs to be ensured that each achieved state information be set up to be conveyed in at least one datalink message before a transition to another state is allowed.</p> <p>Off/Disabled 00000b — Used to indicate that the PTO enable switch is in the off position.</p> <p>Set 00101b — Used to indicate that the PTO device is establishing current speed as the operating speed (captured value).</p> <p><b><u>Additional comment:</u></b></p> <p>The cruise control conditions might vary on different brands.</p> <p>Wheel based speed might vary from tacho speed.</p> <p>The PTO state might be different over the brands (not comparable) due to different internal topology</p> <p>Either SPN 3948 (PTO DE) or SPN 976 (CCVS) is sent. PTO DE message is preferred</p> <p>The clutch switch information is depending on the gear box type *</p> <p>The mentioned resolution is not related to the accuracy of the signal</p>						

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>38 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

## 1.2.2 Electronic Engine Controller #2: EEC2

<b>0x00F003</b>								<b>PGN Hex</b>
<b>61,443</b>								<b>PGN</b>
<b>50 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1						<b>Bit No</b>
Not used for FMS-Standard	<b>Accelerator pedal position 1</b> 0,4 % / Bit gain 0 % offset  <b>SPN 91</b>	<b>Engine Percent Load At Current Speed</b> 1 % / bit, 0 offset 0 to 125 % op. range  <b>SPN 92</b>	Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	<b>Name values values values</b>  <b>SPN</b>

### Description acc. SAE J 1939:

**Accelerator Pedal Position:** The ratio of actual position of the analogue engine speed/torque request input device (such as an accelerator pedal or throttle lever) to the maximum position of the input device. This parameter is intended for the primary accelerator control in an application. If an application has only one accelerator control, use SPN 91. For on-highway vehicles, this will typically be the operator's accelerator pedal. Although it is used as an input to determine powertrain demand, it also provides anticipatory information to transmission and ASR algorithms about driver actions.

### **Engine Percent Load At Current Speed**

At Current Speed

The ratio of actual engine percent torque (indicated) to maximum indicated torque available at the current engine speed, clipped to zero torque during engine braking.

### Additional comment:

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>39 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.2.3 Vehicle Weight: VW

<b>0x00FEEA</b>								PGN Hex																								
<b>65,258</b>								PGN																								
<b>1000 ms</b>								Rep. Rate																								
Data Byte 1		Data Byte 2		Data Byte 3		Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No																					
8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1									Bit No
Axle location Bit-mapped position number counting front to back facing forward F = not available  SPN 928		Axle weight 0.5 kg / Bit gain 0 kg offset  SPN 582		Axle weight 0.5 kg / Bit gain 0 kg offset  SPN 582		Not used for FMS-Standard		Not used for FMS-Standard		Not used for FMS-Standard		Not used for FMS-Standard		Not used for FMS-Standard		Name values values values values values  SPN																
Tire location Bit-mapped counting left to right facing forward  F = not available  SPN 928												Name values values values values values  SPN																				

#### Description acc. SAE J 1939:

**Axle / Tire Location:** To identify to which of several similar devices (such as tires or fuel tanks) the information applies.

The low order 4 bits represent a position number, counting left to right when facing in the direction of normal vehicle travel (forward).

The high order 4 bits represent a position number, counting front to back on the vehicle.

The value 0xFF indicates not available.

It is recommended that output devices add 1 to the position number (range 1 to 15, not 0 to 14) for use by drivers and service technicians.

Examples: Tire pressure for location 0x00 would be left front tire.

Tire pressure for location 0x23 would be right outside rear rear on a 3-axle tractor with dual axle per side (3rd axle, 4th tire)

**Axle weight:** Total mass imposed by the tires on the road surface at the specified axle.

<p style="text-align: center;"> <b>Daimler AG</b>  <b>Daimler Buses-EvoBus GmbH</b>  <b>MAN Truck &amp; Bus AG</b>  <b>Scania AB</b> </p>	<p style="text-align: center;"> <b>Scania CV</b>  <b>Volvo Truck Corporation</b>  <b>Volvo Bus Corporation</b>  <b>Renault Trucks</b> </p>	<p style="text-align: center;"> <b>CNH Industrial</b>  <b>DAF Trucks N.V.</b>  <b>VDL Bus &amp; Coach B.V.</b> </p>	<p style="text-align: center;">Name of document</p> <p style="text-align: center;"><b>FMS-Standard</b></p>			<p style="text-align: center;">Page</p> <p style="text-align: center;"><b>40 (61)</b></p>
<p>Issuer (dept., name, phone, sign)</p> <p style="text-align: center;"><b>ACEA Task Force HDEI/BCEI</b></p>			<p>Date</p> <p><b>17.09.2021</b></p>	<p>Approved</p> <p><b>Final</b></p>	<p>Issue</p> <p><b>Version 04</b></p>	<p>Reg. no.</p>
<p>Subject</p> <p style="text-align: center;"><b>FMS-Standard description</b></p>						
<p><b><u>Additional Comment:</u></b></p> <p>The repetition rate for this PGN is 1000ms and contains information about one axle.</p> <p>If there are more axles available the information will be updated with each repetition (e.g. information about 3 axles will have a repetition of 3000 ms for each axle).</p> <p>Please refer to the OEM documentation for more detailed information.</p>						



<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>41 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.2.4 Service Information: SERV

<b>0x00FEC0</b>								PGN Hex
<b>65,216</b>								PGN
<b>1000 ms</b>								Rep. Rate
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1						Bit No
Not used for FMS-Standard	Service distance <b>5 km / Bit gain</b> -160 635 km offset  SPN 914	Service distance <b>5 km / Bit gain</b> -160 635 km offset  SPN 914	Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	Name  values values  SPN

**Description acc. SAE J 1939:**

**Service distance:** The distance which can be travelled by the vehicle before the next service inspection is required. A negative distance is transmitted if the service inspection has been passed. The component that requires service is identified by the service component identification (see SPN 911-913, 1379, and 1584)

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>42 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.2.5 PTO Drive Engagement: PTO DE

<b>0x00FDA4</b>								PGN Hex
<b>64,932</b>								PGN
<b>100 ms</b>								Rep. Rate
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
						8   7   6   5   4   3   2   1		Bit No.
Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	<b>At least one PTO engaged</b>  <b>00 No PTO drive is engaged</b> <b>01 At least one PTO drive is engaged</b> <b>10 Error</b> <b>11 Not available</b>  <b>SPN 3948</b>	Not used for FMS-Standard	Name Name values values values values values values SPN
						Not used for FMS-Standard		

**Description acc. SAE J 1939:**

Information relating to the request for engagement, consent for engagement, and status of engagement of various specific physical PTO drives.

This message may be broadcast by one or all controllers involved in the enabling of a given PTO drive

**At least one PTO engaged:** Indicates that at least one PTO is engaged

Note: This parameter should only be sent by the controller that has knowledge of all PTO drives on the vehicle (e.g, the FMS gateway).

Individual PTO drive controllers should broadcast this parameter as "not available".

**Additional comment:**

Either SPN 3948 (PTO DE) or SPN 976 (CCVS) is sent. PTO DE message is preferred

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>43 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.2.6 Combination Vehicle Weight: CVW

<b>0x00FE70</b>								PGN Hex
<b>65,136</b>								PGN
<b>10 000 ms</b>								Rep. Rate
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
		8   7   6   5   4   3   2   1	8   7   6   5   4   3   2   1					Bit No.
Not used for FMS-Standard	Not used for FMS-Standard	<b>Gross Combination Vehicle Weight</b>  <b>10 kg/bit</b> <b>0 offset</b> <b>0 to 642,550 kg</b>  <b>SPN 1760</b>	<b>Gross Combination Vehicle Weight</b>  <b>10 kg/bit</b> <b>0 offset</b> <b>0 to 642,550 kg</b>  <b>SPN 1760</b>	Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	Not used for FMS-Standard	<b>Name</b> <b>Name</b> <b>values</b> <b>values</b> <b>values</b> <b>values</b> <b>SPN</b>

**Description acc. SAE J 1939:**

The total weight of the truck and all attached trailers.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal

Subject  
**FMS-Standard description**

### 1.3 Parameters for Bus FMS-Standard

#### 1.3.1 Cruise Control/Vehicle Speed: CCVS

<b>0x00FEF1</b>								PGN Hex																														
<b>65,265</b>								PGN																														
<b>100 ms</b>								Rep. Rate																														
Data Byte 1		Data Byte 2		Data Byte 3		Data Byte 4		Data Byte 5	Data Byte 6	Data Byte 7		Data Byte 8	Byte No																									
8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1			8	7	6	5	4	3	2	1					Bit No
Not used in Bus FMS-Standard		Wheel based speed 1/256 km/h Bit gain 0 km/h offset  SPN 84		Wheel based speed 1/256 km/h Bit gain 0 km/h offset  SPN 84		Clutch switch 00 = pedal released 01 = pedal pressed  SPN 598		Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Cruise Control States 000 - Off/Disabled 001 - Hold 010 - Accelerate 011 - Decelerate 100 - Resume 101 - Set 110 - Accel. Override 111 - Not available SPN 527		Not used in Bus FMS-Standard		Name values values values values values values values SPN																								
Parking Brake Switch 00 = Parking brake not set 01 = Parking brake set  SPN 70						Brake switch 00 = pedal released 01 = pedal depressed  SPN 597				Not used in Bus FMS-Standard		Name values values values values values values values SPN																										
						Not used in Bus FMS-Standard Cruise control active 00 = switched off 01 = switched on  SPN 595						Name values values values values values values values SPN																										

<p style="text-align: center;">Daimler AG Daimler Buses-EvoBus GmbH MAN Truck &amp; Bus AG Scania AB</p>	<p style="text-align: center;">Scania CV Volvo Truck Corporation Volvo Bus Corporation Renault Trucks</p>	<p style="text-align: center;">CNH Industrial DAF Trucks N.V. VDL Bus &amp; Coach B.V.</p>	<p style="text-align: center;">Name of document  <b>FMS-Standard</b></p>		<p style="text-align: center;">Page  <b>45 (61)</b></p>	
<p>Issuer (dept., name, phone, sign) <b>ACEA Task Force HDEI/BCEI</b></p>			<p>Date <b>17.09.2021</b></p>	<p>Approved <b>Final</b></p>	<p>Issue <b>Version 04</b></p>	<p>Reg. no.</p>
<p>Subject <b>FMS-Standard description</b></p>						
<p><b><u>Description acc. SAE J 1939:</u></b></p> <p><b>Parking Brake Switch:</b> Switch signal which indicates when the parking brake is set. In general the switch actuated by the operator's park brake control, whether a pedal, lever or other control mechanism.</p> <p><b>Wheel Based Speed:</b> Speed of the vehicle as calculated from wheel or tailshaft speed.</p> <p><b>Clutch Switch:</b> Switch signal which indicates that the clutch pedal is being pressed. It is necessary for a safe drivetrain behaviour that the clutch switch is set before the clutch is opened (cruise control function).</p> <p><b>Brake Switch:</b> Switch signal which indicates that the driver operated brake foot pedal is being pressed. This brake foot pedal is controlling the vehicles' service brake (total vehicle braking application, not park brakes). It is necessary for safe drivetrain behaviour that the switch activates before the physical braking components are activated (i.e. Disengage the cruise control function prior to the activation of friction brakes).</p> <p><b>Cruise Control Active:</b> Cruise control is switched on. It is not ensured that the engine is controlled by cruise control, as in the case of a large driver's demand the engine is controlled by the driver while cruise control is active (maximum selection of cruise control and driver's demand). The cruise control is set to 0 if a switch off condition occurs.</p> <p><b><u>Additional comment:</u></b></p> <p>The cruise control conditions might vary on different brands.</p> <p>Wheel based speed might vary from tacho speed.</p> <p>The clutch switch information is depending on the gear box type *</p> <p>The mentioned resolution is not related to the accuracy of the signal</p>						

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>46 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.3.2 Electronic Engine Controller #2 : EEC2

<b>0x00F003</b>								<b>PGN Hex</b>
<b>61,443</b>								<b>PGN</b>
<b>50 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
	8   7   6   5   4   3   2   1							<b>Bit No</b>
Not used in Bus FMS-Standard	<b>Accelerator pedal position</b> <b>0,4 % / Bit gain</b> <b>0 % offset</b>  <b>SPN 91</b>	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	<b>Name</b> <b>Name</b> <b>values</b> <b>values</b> <b>values</b> <b>SPN</b>

**Description acc. SAE J 1939:**

**Accelerator Pedal Position:** The ratio of actual position of the analogue engine speed/torque request input device (such as an accelerator pedal or throttle lever) to the maximum position of the input device. This parameter is intended for the primary accelerator control in an application. If an application has only one accelerator control, use SPN 91. For on-highway vehicles, this will typically be the operator's accelerator pedal. Although it is used as an input to determine powertrain demand, it also provides anticipatory information to transmission and ASR algorithms about driver actions.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>47 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.3.3 Door Control 1: DC1

<b>0x00FE4E</b>								<b>PGN Hex</b>
<b>65,102</b>								<b>PGN</b>
<b>100 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
8   7   6   5   4   3   2   1								Bit No.
<b>Status 2 of doors</b> 00 = all bus doors disabled 01 = at least 1 bus door enabled 10 = error 11 = not available  SPN 3411	Not used in Bus-FMS-Standard	Not used in Bus-FMS-Standard	Not used in Bus-FMS-Standard	Not used in Bus-FMS-Standard	Not used in Bus-FMS-Standard	Not used in Bus-FMS-Standard	Not used in Bus-FMS-Standard	Name values values values values values values SPN
<b>Ramp/Wheel chairlift</b> 00 = inside bus 01 = outside bus 10 = Error 11 = not available  SPN 1820								Name values values values values values SPN
<b>Position of doors</b> 0000 = at least 1 door is open 0001 = closing last door 0010 = all doors closed 0011-1101 not defined 1110 = Error 1111 = not available SPN 1821								Name values values values values values values values values values SPN

**Description acc. SAE J 1939:**

**Status 2 of doors:** Composite indication of all bus door statuses. Enabled means the bus doors are able to be automatically opened or closed..

**Ramp/Wheel Chair Lift Position:** Signal which indicates the actual position of the ramp / wheel chair lift.

**Position of Doors:** Signal which indicates the actual position of the doors.

**Additional comment:**

For the door configuration please contact the manufacturer of the vehicle

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>48 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.3.4 Door Control 2: DC2

0x00FDA5								PGN Hex
64,933								PGN
100 ms								Rep. Rate
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	Bit No.
<b>Lock Status Door 2</b> 00 = Unlocked 01 = Locked 10 = Error 11 = Not available  SPN 3415	<b>Open Status Door 3</b> 00 = Closed 01 = Open 10 = Error 11 = Not available  SPN 3419	<b>Enable Status Door 4</b> 00 = Disabled 01 = Enabled 10 = Error 11 = Not available  SPN 3423	<b>Lock Status Door 6</b> 00 = Unlocked 01 = Locked 10 = Error 11 = Not available  SPN 3427	<b>Open Status Door 7</b> 00 = Closed 01 = Open 10 = Error 11 = Not available  SPN 3431	<b>Enable Status Door 8</b> 00 = Disabled 01 = Enabled 10 = Error 11 = Not available  SPN 3435	<b>Lock Status Door 10</b> 00 = Unlocked 01 = Locked 10 = Error 11 = Not available  SPN 3439	Not defined	Name values values values values SPN
<b>Enable Status Door 1</b> 00 = Disabled 01 = Enabled 10 = Error 11 = Not available  SPN 3414	<b>Lock Status Door 3</b> 00 = Unlocked 01 = Locked 10 = Error 11 = Not available  SPN 3418	<b>Open Status Door 4</b> 00 = Closed 01 = Open 10 = Error 11 = Not available  SPN 3422	<b>Enable Status Door 5</b> 00 = Disabled 01 = Enabled 10 = Error 11 = Not available  SPN 3426	<b>Lock Status Door 7</b> 00 = Unlocked 01 = Locked 10 = Error 11 = Not available  SPN 3430	<b>Open Status Door 8</b> 00 = Closed 01 = Open 10 = Error 11 = Not available  SPN 3434	<b>Enable Status Door 9</b> 00 = Disabled 01 = Enabled 10 = Error 11 = Not available  SPN 3438	Not defined	Name values values values values SPN
<b>Open Status Door 1</b> 00 = Closed 01 = Open 10 = Error 11 = Not available  SPN 3413	<b>Enable Status Door 2</b> 00 = Disabled 01 = Enabled 10 = Error 11 = Not available  SPN 3417	<b>Lock Status Door 4</b> 00 = Unlocked 01 = Locked 10 = Error 11 = Not available  SPN 3421	<b>Open Status Door 5</b> 00 = Closed 01 = Open 10 = Error 11 = Not available  SPN 3425	<b>Enable Status Door 6</b> 00 = Disabled 01 = Enabled 10 = Error 11 = Not available  SPN 3429	<b>Lock Status Door 8</b> 00 = Unlocked 01 = Locked 10 = Error 11 = Not available  SPN 3433	<b>Open Status Door 9</b> 00 = Closed 01 = Open 10 = Error 11 = Not available  SPN 3437	<b>Enable Status Door 10</b> 00 = Disabled 01 = Enabled 10 = Error 11 = Not available  SPN 3441	Name values values values values SPN
<b>Lock Status Door 1</b> 00 = Unlocked 01 = Locked 10 = Error 11 = Not available  SPN 3412	<b>Open Status Door 2</b> 00 = Closed 01 = Open 10 = Error 11 = Not available  SPN 3416	<b>Enable Status Door 3</b> 00 = Disabled 01 = Enabled 10 = Error 11 = Not available  SPN 3420	<b>Lock Status Door 5</b> 00 = Unlocked 01 = Locked 10 = Error 11 = Not available  SPN 3424	<b>Open Status Door 6</b> 00 = Closed 01 = Open 10 = Error 11 = Not available  SPN 3428	<b>Enable Status Door 7</b> 00 = Disabled 01 = Enabled 10 = Error 11 = Not available  SPN 3432	<b>Lock Status Door 9</b> 00 = Unlocked 01 = Locked 10 = Error 11 = Not available  SPN 3436	<b>Open Status Door 10</b> 00 = Closed 01 = Open 10 = Error 11 = Not available  SPN 3440	Name values values values values SPN

**Remark:**

<b>Lock Status:</b>	locked -> doors cannot be operated by the driver or a passenger unlocked -> door may be operated by the driver or a passenger	<b>Open Status:</b>	closed -> door is completely closed open -> door is not completely closed
<b>Enable Status:</b>	disabled -> door cannot be opened by a passenger enabled -> door can be opened by a passenger		

**Additional comment:**  
For the door configuration please contact the manufacturer of the vehicle



<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>49 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.3.5 Time / Date : TD

<b>0x00FEE6</b>								<b>PGN Hex</b>
<b>65,254</b>								<b>PGN</b>
<b>1000 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte	Data Byte	Byte No
8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	Bit No.
Seconds	Minutes	Hours	Month	Day	Year	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Name values values values values
0.25 s/Bit	1 min /Bit	1 hr/Bit	1 month/Bit	0.25 day/Bit	1 year/Bit			values
0 Offset	0 offset	0 offset	0 offset	0 offset	1985 years offset			values
SPN 959	SPN 960	SPN 961	SPN 963	SPN 962	SPN 964			SPN

**Description acc. SAE J 1939:**

**Seconds:** Part of a parameter used to represent time.

**Minutes:** Part of a parameter used to represent time.

**Hours:** Part of a parameter used to represent time.

**Month:** Part of a parameter used to represent a calendar date.

NOTE - A value of 0 for the month is null. The value 1 identifies January; 2 identifies February; etc.

**Day:** Part of a parameter used to represent a calendar date.

NOTE - A value of 0 for the date is null. The values 1, 2, 3, and 4 are used to identify the first day of the month; 5, 6, 7, and 8 identify the second day of the month; etc.

**Year:** Part of a parameter used to represent a calendar date.

NOTE - A value of 0 for the year identifies the year 1985; a value of 1 identifies 1986; etc.

**Additional comment:**

Difference to SAE: broadcast instead of on request

Time base is OEM dependant \*

Subject  
**FMS-Standard description**

**1.3.6 Alternator Speed : AS**

<b>0x00FED5</b>								<b>PGN Hex</b>
<b>65,237</b>								<b>PGN</b>
<b>1000 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
		8   7   6   5   4   3   2   1						Bit No.
Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	<b>Alternator Status 4</b> 00 = not charging 01 = charging 10 = error 11 = not available  SPN 3356	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Name values values values values values SPN
		<b>Alternator Status 3</b> 00 = not charging 01 = charging 10 = error 11 = not available  SPN 3355						Name values values values values values SPN
		<b>Alternator Status 2</b> 00 = not charging 01 = charging 10 = error 11 = not available  SPN 3354						Name values values values values values SPN
		<b>Alternator Status 1</b> 00 = not charging 01 = charging 10 = error 11 = not available  SPN 3353						Name values values values values values SPN

**Description acc. SAE J 1939:**

Actual alternator 1-4 status

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>51 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.3.7 Electronic Transmission Controller 2 : ETC2

<b>0x00F005</b>								<b>PGN Hex</b>
<b>61,445</b>								<b>PGN</b>
<b>100 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
8   7   6   5   4   3   2   1			8   7   6   5   4   3   2   1					Bit No.
<b>Selected Gear</b> 1 gear value/Bit -125 offset negative gear are reverse gears 00000000 = neutral 11111011 = park  SPN 524	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	<b>Current Gear</b> 1 gear value/Bit -125 offset negative gear are reverse gears 00000000 = neutral 11111011 = park  SPN 523	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Name values values values values values values SPN

**Description acc. SAE J 1939:**

**Selected Gear:** The gear that the transmission will attempt to achieve during the current shift if a shift is in progress, or the next shift if one is pending (i.e., waiting for torque reduction to initiate the shift).

**Current Gear :** The gear currently engaged in the transmission or the last gear engaged while the transmission is in the process of shifting to the new or selected gear. Transitions toward a destination gear will not be indicated. Once the selected gear has been engaged then Current Gear will reflect that gear.

**Additional comment:**

The signal might have limited resolution for gearboxes without electronic control units \*

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>52 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject **FMS-Standard description**

### 1.3.8 Air Suspension Control 4 : ASC4

<b>0x00FE58</b>								<b>PGN Hex</b>
<b>65,112</b>								<b>PGN</b>
<b>100 ms</b>								<b>Rep. Rate</b>
<b>Data Byte 1</b>	<b>Data Byte 2</b>	<b>Data Byte 3</b>	<b>Data Byte 4</b>	<b>Data Byte 5</b>	<b>Data Byte 6</b>	<b>Data Byte 7</b>	<b>Data Byte 8</b>	<b>Byte No</b>
<b>8 - 1</b>	<b>8 - 1</b>	<b>8 - 1</b>	<b>8 - 1</b>	<b>8 - 1</b>	<b>8 - 1</b>	<b>8 - 1</b>	<b>8 - 1</b>	<b>Bit No.</b>
<b>Bellow Pressure Front Axle Left</b> 0.1 kPa/Bit 0 offset  SPN 1725	<b>Bellow Pressure Front Axle Left</b> 0.1 kPa/Bit 0 offset  SPN 1725	<b>Bellow Pressure Front Axle Right</b> 0.1 kPa/Bit 0 offset  SPN 1726	<b>Bellow Pressure Front Axle Right</b> 0.1 kPa/Bit 0 offset  SPN 1726	<b>Bellow Pressure Rear Axle Left</b> 0.1 kPa/Bit 0 offset  SPN 1727	<b>Bellow Pressure Rear Axle Left</b> 0.1 kPa/Bit 0 offset  SPN 1727	<b>Bellow Pressure Rear Axle Right</b> 0.1 kPa/Bit 0 offset  SPN 1728	<b>Bellow Pressure Rear Axle Right</b> 0.1 kPa/Bit 0 offset  SPN 1728	<b>Name</b> <b>Name values</b> <b>values</b> <b>values</b> <b>values</b> <b>SPN</b>

**Description acc. SAE J 1939:**

Used for bellow pressure information

**Additional comment:**

The configuration is manufacturer dependant.\*

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>53 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.3.9 Vehicle Electrical Power #4 : VEP4

<b>0x00FCB7</b>								<b>PGN Hex</b>
<b>64,695</b>								<b>PGN</b>
<b>10000 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
8 - 1	8 - 1	8 - 1	8 - 1	8 - 1	8 - 1	8 - 1	8 - 1	Bit No.
Hybrid Battery Pack Remaining Charge 0.0025 %/bit 0 to 160.6375 %  SPN 5464	Hybrid Battery Pack Remaining Charge 0.0025 %/bit 0 to 160.6375 %  SPN 5464	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Name Name values values values values SPN

**Description acc. SAE J 1939:**

Indicates the hybrid battery pack remaining charge.  
0% means no charge remaining,  
100% means full charge remaining.

**Additional comment:**

The mentioned resolution is not related to the accuracy of the signal

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>54 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 1.3.10 Vehicle Dynamic Stability Control 2 : VDC2

<b>0x00F009</b>								<b>PGN Hex</b>
<b>61,449</b>								<b>PGN</b>
<b>100 ms</b>								<b>Rep. Rate</b>
Data Byte 1	Data Byte 2	Data Byte 3	Data Byte 4	Data Byte 5	Data Byte 6	Data Byte 7	Data Byte 8	Byte No
8 - 1	8 - 1	8 - 1	8 - 1	8 - 1	8 - 1	8 - 1	8 - 1	Bit No.
Steering Wheel Angle	Steering Wheel Angle	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Not used in Bus FMS-Standard	Name Name values values values SPN
1/1024 rad per bit, - 31.374 rad offset	1/1024 rad per bit, - 31.374 rad offset							
SPN 1807	SPN 1807							

**Description acc. SAE J 1939:**

The main operator`s steering wheel angle (on the steering column, not the actual wheel angle).  
The vehicle being steered to the left (counterclockwise) results in a positive steering wheel angle.  
This is the yaw angle of the steering wheel with the z-axis along the centerline of the steering column.  
This parameter is defined according to a Z-Up axis system and the sign of the value is in accordance to the right-hand rule, as specified in SAE J670.  
As specified in SAE J670, a Z-Up Axis System has positive X directed forward, positive Y to the left, and positive Z directed up.

**Additional Comment:**

The mentioned resolution is not related to the accuracy of the signal  
  
The repetition rate can be higher than 100ms and is OEM dependant.\*

<b>Daimler AG</b> Daimler Buses-EvoBus GmbH MAN Truck & Bus AG Scania AB	<b>Scania CV</b> Volvo Truck Corporation Volvo Bus Corporation Renault Trucks	<b>CNH Industrial</b> DAF Trucks N.V. VDL Bus & Coach B.V.	Name of document  <b>FMS-Standard</b>	Page  <b>55 (61)</b>
---	--	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

## 2 Examples

### 2.1 Broadcast Announce Message (BAM) for Vehicle ID longer than 8 Byte

Transport Protocol – Connection Management (TP.CM)


<b>0x00ECFF</b>								PGN Hex
<b>60,671</b>								PGN
Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8	Byte No
								Bit No
Control byte should be filled with (20 <sub>16</sub> )	Total message size, number of bytes	Total message size, number of bytes	Total number of packets	Reserved should be filled with FF <sub>16</sub>	Parameter Group Number of packeted message	Parameter Group Number of packeted message	Parameter Group Number of packeted message	Name values values values SPN

Transport Protocol – Data Transfer (TP.DT)

<b>0x00EBFF</b>								PGN Hex
<b>60,415</b>								PGN
Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8	Byte No
								Bit No
Sequence Number	Packetized Data	Packetized Data	Packetized Data	Packetized Data	Packetized Data	Packetized Data	Packetized Data	Name values values values SPN

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>		Page  <b>56 (61)</b>
Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>			Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>
Subject  <b>FMS-Standard description</b>					

In the situation shown in Figure 1, a node indicates to the network that it is about to transfer a multipacket message utilizing the service of the transport protocol. In this example, the PGN 00FEEC<sub>16</sub> (Vehicle Identification) is being broadcasted to the network. The length of the Vehicle ID in this example is 17. The unused bytes in the last TP.DT are filled with FF<sub>16</sub>. The originating node first transmits a TP.CM Broadcast Announce Message (BAM) followed by the data packets. No acknowledgment is performed by any of the responders.

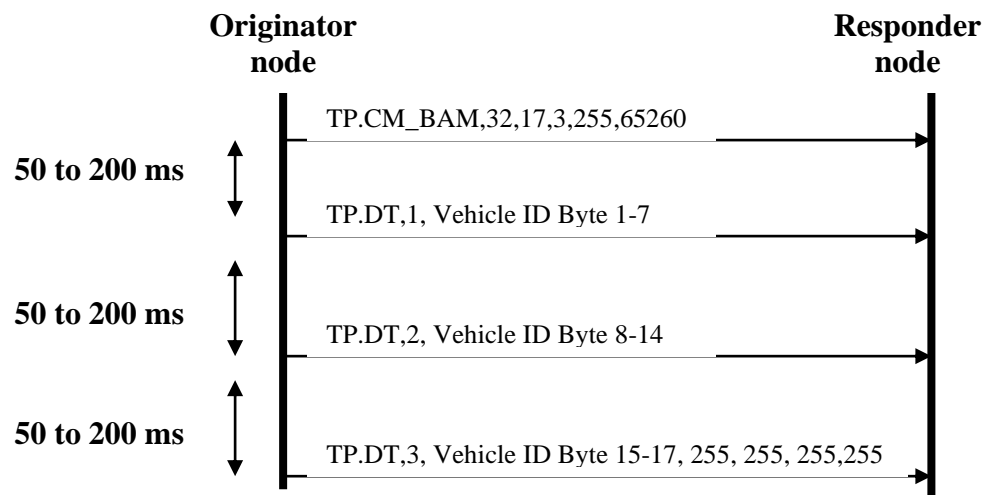

**Figure 1**

Time (ms)	ID	DLC	Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
0	PR EC FF SA <sub>16</sub>	8	20 <sub>16</sub>	11 <sub>16</sub>	00 <sub>16</sub>	03 <sub>16</sub>	FF <sub>16</sub>	EC <sub>16</sub>	FE <sub>16</sub>	00 <sub>16</sub>
50	PR EB FF SA <sub>16</sub>	8	01 <sub>16</sub>	Vehicle ID byte 1 – 7						
100	PR EB FF SA <sub>16</sub>	8	02 <sub>16</sub>	Vehicle ID byte 8 – 14						
150	PR EB FF SA <sub>16</sub>	8	03 <sub>16</sub>	Vehicle ID byte 15	Vehicle ID byte 16	Vehicle ID byte 17	FF <sub>16</sub>	FF <sub>16</sub>	FF <sub>16</sub>	FF <sub>16</sub>

PR is Priority (to be masked)

SA is Source Address (to be masked)



<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>			Page  <b>57 (61)</b>
--	---	--	---	--	--	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

## 2.2 Example SW Identification for buses and/or trucks

	ID	Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Supporting Bus-FMS-Standard Version 01	0x00FD D1 <sub>16</sub>	X0 <sub>16</sub>	30 <sub>16</sub>	30 <sub>16</sub>	30 <sub>16</sub>	31 <sub>16</sub>	FF <sub>16</sub>	FF <sub>16</sub>	FF <sub>16</sub>
Supporting Truck-FMS-Standard Version 02	0x00FD D1 <sub>16</sub>	X0 <sub>16</sub>	30 <sub>16</sub>	32 <sub>16</sub>	30 <sub>16</sub>	30 <sub>16</sub>	FF <sub>16</sub>	FF <sub>16</sub>	FF <sub>16</sub>
Supporting Bus FMS-Standard Version 03 and Truck FMS-Standard Version 03	0x00FD D1 <sub>16</sub>	X0 <sub>16</sub>	30 <sub>16</sub>	33 <sub>16</sub>	30 <sub>16</sub>	33 <sub>16</sub>	FF <sub>16</sub>	FF <sub>16</sub>	FF <sub>16</sub>

**Remark:**     **Byte 2 – Byte 5 are ASCII**             **X=reserved and set to F<sub>16</sub>**  
**30<sub>16</sub> = “0” ASCII**  
**31<sub>16</sub> = “1” ASCII**  
**32<sub>16</sub> = “2” ASCII**  
**33<sub>16</sub> = “3” ASCII**

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>58 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

### 2.3 Example FMS Tell Tale Status

ID	Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
<b>0x00FD7D</b> <sub>16</sub>	<b>B0</b> <sub>16</sub>	<b>FF</b> <sub>16</sub>	<b>FF</b> <sub>16</sub>	<b>9F</b> <sub>16</sub>	<b>FA</b> <sub>16</sub>	<b>A8</b> <sub>16</sub>	<b>9B</b> <sub>16</sub>	<b>FF</b> <sub>16</sub>
TTS	Block ID = 0 Status 1 = Info	Status 2 = not av. Status 3 = not av.	Status 4 = not av. Status 5 = not av.	Status 6 = not av. Status 7 = Red	Status 8 = Yellow Status 9 = not av.	Status 10 = off Status 11 = Yellow	Status 12 = Info Status 13 = Red	Status 14 = not av. Status 15 = not av.
<b>0x00FD7D</b> <sub>16</sub>	<b>F1</b> <sub>16</sub>	<b>8F</b> <sub>16</sub>	<b>AF</b> <sub>16</sub>	<b>B8</b> <sub>16</sub>	<b>FB</b> <sub>16</sub>	<b>88</b> <sub>16</sub>	<b>AA</b> <sub>16</sub>	<b>BB</b> <sub>16</sub>
TTS	Block ID = 1 Status 1 = not av.	Status 2 = not av. Status 3 = off	Status 4 = not av. Status 5 = Yellow	Status 6 = off Status 7 = Info	Status 8 = Info Status 9 = not av.	Status 10 = off Status 11 = off	Status 12 = Yellow Status 13 = Yellow	Status 14 = Info Status 15 = Info
<b>0x00FD7D</b> <sub>16</sub>	<b>A2</b> <sub>16</sub>	<b>F8</b> <sub>16</sub>	<b>88</b> <sub>16</sub>	<b>FF</b> <sub>16</sub>	<b>FF</b> <sub>16</sub>	<b>AF</b> <sub>16</sub>	<b>FF</b> <sub>16</sub>	<b>FF</b> <sub>16</sub>
TTS	Block ID = 2 Status 1 = Yellow	Status 2 = off Status 3 = not av.	Status 4 = off Status 5 = off	Status 6 = not av. Status 7 = not av.	Status 8 = not av. Status 9 = not av.	Status 10 = not av. Status 11 = Yellow	Status 12 = not av. Status 13 = not av.	Status 14 = not av. Status 15 = not av.
<b>0x00FD7D</b> <sub>16</sub>	<b>F3</b> <sub>16</sub>	<b>BB</b> <sub>16</sub>	<b>88</b> <sub>16</sub>	<b>88</b> <sub>16</sub>	<b>8B</b> <sub>16</sub>	<b>88</b> <sub>16</sub>	<b>88</b> <sub>16</sub>	<b>88</b> <sub>16</sub>
TTS	Block ID = 3 Status 1 = not av.	Status 2 = Info Status 3 = Info	Status 4 = off Status 5 = off	Status 6 = off Status 7 = off	Status 8 = Info Status 9 = off	Status 10 = off Status 11 = off	Status 12 = off Status 13 = off	Status 14 = off Status 15 = off

**Remark:** The repetition rate of the PGN is 1000ms which means that the complete "Tell Tale" Msg. (four Blocks) is sent every 4000 ms

Due to the repetition rate of the message, it is not guaranteed to include all intermittent signals.\*

not av. = not available

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>59 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

Block ID	Status No	Status	Name	Block ID	Status No	Status	Name
0	1	Info	Cooling air conditioning	2	1	Yellow	Steering failure
0	2	Not av.	High beam, main beam	2	2	Off	Height Control (Levelling)
0	3	Not av.	Low beam, dipped beam	2	3	Not av.	Retarder
0	4	Not av.	Turn signals	2	4	Off	Engine Emission system failure (Mil indicator)
0	5	Not av.	Hazard warning	2	5	Off	ESC indication
0	6	Not av.	Provision for the disabled or handicapped persons	2	6	Not av.	Brake lights
0	7	Red	Parking Brake	2	7	Not av.	Articulation
0	8	Yellow	Brake failure/brake system malfunction	2	8	Not av.	Stop Request
0	9	Not av.	Hatch open	2	9	Not av.	Pram request
0	10	Off	Fuel level	2	10	Not av.	Bus stop brake
0	11	Yellow	Engine coolant temperature	2	11	Yellow	AdBlue level
0	12	Info	Battery charging condition	2	12	Not av.	Raising
0	13	Red	Engine oil	2	13	Not av.	Lowering
0	14	Not av.	Position lights,side lights	2	14	Not av.	Kneeling
0	15	Not av.	Front fog light	2	15	Not av.	Engine compartment temperature
1	1	Not av.	Rear fog light	3	1	Not av.	Auxillary air pressure
1	2	Not av.	Park Heating	3	2	Info	Air filter clogged
1	3	Off	Engine	3	3	Info	Fuel filter differential pressure
1	4	Not av.	Service, call for maintenance	3	4	Off	Seat belt
1	5	Yellow	Transmission fluid temperature	3	5	Off	EBS
1	6	Off	Transmission failure/malfunction	3	6	Off	Lane departure indication
1	7	Info	Anti-lock brake system failure	3	7	Off	Advanced emergency braking system
1	8	Info	Worn brake linings	3	8	Info	ACC
1	9	Not av.	Windscreen washer fluid/windshield washer fluid	3	9	Off	Trailer connected
1	10	Off	Tire failure/malfunction	3	10	Off	ABS Trailer 1,2
1	11	Off	Malfunction/general failure	3	11	Off	Airbag
1	12	Yellow	Engine oil temperature	3	12	Off	EBS Trailer 1,2
1	13	Yellow	Engine oil level	3	13	Off	Tachograph indication
1	14	Info	Engine coolant level	3	14	Off	ESC switched off
1	15	Info	Steering fluid level	3	15	Off	Lane departure warning switched off

**Subject**  
**FMS-Standard description**

### 3 Overview Messages

			(signal) name	Mandatory	rep. rate	remarks / comments	
page	PGN	SPN	e.g. mileage, fuel consumption	Truck only	in ms		
Truck AND Bus Section		Truck AND Bus Section		Truck AND Bus Section		Truck AND Bus Section	Truck AND Bus Section
9	65257	250	Engine total fuel used		1000	4 bytes, 0 to +2 105 540 607,5 L	Might be set to "not available" if SPN 5054 is available
10	65276	96	Fuel level 1	X (worldwide)	1000	1 Byte	-
10	65276	38	Fuel level 2		1000	1 Byte	Only used if different fuel types in different storage container
11	61444	513	Actual Engine – Percent Torque	X (worldwide)	20	1 % / Bit, -125 % offset	-
11	61444	190	engine speed	X (worldwide)	20	2 Byte, 0-8031,875 rpm	-
12	65253	247	Engine total hours of Operation	X (worldwide)	1000	4 bytes, 0 to 210 554 060,75 h	Counter is Engine running dependant
13	65260	237	vehicle identification number	X (worldwide)	10000	variable, max 200 char.	Will be sent every 10 sec
14	64977	2806	SW-version supported	X (worldwide)	10000	Indicator for SW version supported	-
14	64977	2804	Diagnostics supported	X (worldwide)	10000	indicator for diagnosis session support	-
14	64977	2805	Requests supported	X (worldwide)	10000	indicator for request supported	-
16	65217	917	High resolution total vehicle distance	X (worldwide)	1000	4 bytes, 0 - 21 055 406 km; without TCO	Resolution may be not within the SAE values
17	65132	1611	Vehicle motion	X (EU)	20/50	With digital tachograph	rep. rate tachograph dependant
17	65132	1613	driver 2 working state	X (EU)	20/50	With digital tachograph	rep. rate tachograph dependant
17	65132	1612	driver 1 working state	X (EU)	20/50	With digital tachograph	rep. rate tachograph dependant
17	65132	1614	Vehicle overspeed		20/50	With digital tachograph	rep. rate tachograph dependant
17	65132	1617	Driver 1 time rel. states		20/50	With digital tachograph	rep. rate tachograph dependant
17	65132	1618	Driver 2 time rel. states		20/50	With digital tachograph	rep. rate tachograph dependant
17	65132	1615	Driver 1 card	X (EU)	20/50	With digital tachograph	rep. rate tachograph dependant
17	65132	1616	Driver 2 card	X (EU)	20/50	With digital tachograph	rep. rate tachograph dependant
17	65132	1619	Direction indicator		20/50	With digital tachograph	rep. rate / availability is tachograph dependant.
17	65132	1620	Tachograph performance	X (EU)	20/50	With digital tachograph	rep. rate tachograph dependant
17	65132	1621	Handling information	X (EU)	20/50	With digital tachograph	rep. rate tachograph dependant
17	65132	1622	System event	X (EU)	20/50	With digital tachograph	rep. rate tachograph dependant
17	65132	1624	Tachograph vehicle speed	X (EU)	20/50	With digital tachograph - 2 bytes	rep. rate tachograph dependant/might differ from the wheel based speed
19	65262	110	engine coolant temperature	X (worldwide)	1000	-40° to 210°	-
20	65269	171	Ambient Air Temperature	X (worldwide)	1000	0.03125 °C / Bit gain	- 273 °C offset
21	65131	1625/1626	Driver 1 / Driver 2 Identification	X (EU)	10000	If a driver ID is available the message is sent with a Broadcast Announce Message (BAM)	Diff. to SAE: broadcast instead of on request
22	65266	183	Fuel rate	X (worldwide)	100	0.05 L/h per bit, 0 to 3.212.75 L/h	Calculated values given as indications, not as contractual
22	65266	184	Instantaneous Fuel Economy	X (worldwide)	100	1/512 km/L per bit, 0 to 125,5 km/L	Calculated values given as indications, not as contractual
23	65198	1087	Service Brake Air Pressure Circuit #1	X (worldwide)	1000	8 kPa/Bit, 0 offset	-
23	65198	1088	Service Brake Air Pressure Circuit #2	X (worldwide)	1000	8 kPa/Bit, 0 offset	-
24	64777	5054	High resolution engine total fuel used		1000	0.001 L/bit, 0 to 4,211,081.215 L	Is implemented if technical possible
25	65110	1761	Aftertreatment 1 Diesel Exhaust Fluid Tank 1 Level		1000	0.4 %/bit, 0 % offset	-
26	64893		FMS Tell Tale Status	X (worldwide ,EU) Not all tell tales	1000	-	5 blocks => Rep.rate for each tell tale status might be 5 sec if all blocks are sent
30	61441	521	Brake Pedal Position		100	-	-
31	64962	5837	Fuel Type		10000	-	-
33	65117	1040	Total fuel used (Gaseous)		1000	-	-
34	61440	900	Retarder Torque Mode		100	16 states/4 bit, 0 offset	-
34	61440	520	Actual Retarder - Percent Torque		100	1 %/bit, -125 % offset	-
34	61440	1716	Retarder Selection, non-engine		100	0.4 %/bit, 0 % offset	The value is related to the drive line retarder
Truck only Section		Truck only Section		Truck only Section		Truck only Section	
35	65265	84	wheel based speed		100	may differ from TCO1	-
35	65265	598	clutch switch		100	two bit status	in trucks with automatic gear => send as not available
35	65265	597	Brake switch		100	two bit status	-
35	65265	595	cruise control active		100	two bit status	in trucks with no cruise control => send as not available
35	65265	976	PTO state		100	Either SPN 3948 (PTOE) or SPN 976 is sent	SPN 3948 (PTO DE) message is preferred
35	65265	70	Parking brake switch		100	-	-
35	65265	527	Cruise Control States		100	-	-
37	61443	91	accelerator pedal position 1	X (worldwide)	50	1 Byte	-
37	61443	92	Engine Percent Load At Current Speed	X (worldwide)	50	1 % / bit, 0 to 125 % operational range	-

<b>Daimler AG</b> <b>Daimler Buses-EvoBus GmbH</b> <b>MAN Truck &amp; Bus AG</b> <b>Scania AB</b>	<b>Scania CV</b> <b>Volvo Truck Corporation</b> <b>Volvo Bus Corporation</b> <b>Renault Trucks</b>	<b>CNH Industrial</b> <b>DAF Trucks N.V.</b> <b>VDL Bus &amp; Coach B.V.</b>	Name of document  <b>FMS-Standard</b>	Page  <b>61 (61)</b>
--	---	--	---	----------------------------

Issuer (dept., name, phone, sign)  <b>ACEA Task Force HDEI/BCEI</b>	Date <b>17.09.2021</b>	Approved <b>Final</b>	Issue <b>Version 04</b>	Reg. no.
---	---------------------------	--------------------------	----------------------------	----------

Subject  
**FMS-Standard description**

38	65258	928	Axle location	1000	-	If info of more axles available it will be updated with each repetition
38	65258	928	Tire location	1000	-	-
38	65258	582	Axle weight	1000	-	-
40	65216	914	Service distance	1000	-	-
41	64932	3948	At least one PTO engaged	100	Either SPN 3948 or SPN 976 (CCVS) is sent	SPN 3948 (PTO DE) message is preferred
42	65136	1760	Gross Combination Vehicle Weight	10000	0 to 642,550 kg	Diff. to SAE: broadcast instead of on request
<b>Bus only Section</b>		<b>Bus only Section</b>		<b>Bus only Section</b>		<b>Bus only Section</b>
43	65265	84	wheel based speed	100	may differ from TCO1	-
43	65265	598	clutch switch	100	two bit status	in trucks with automatic gear => send as not available
43	65265	597	Brake switch	100	two bit status	-
43	65265	595	cruise control active	100	two bit status	in trucks with no cruise control => send as not available
43	65265	70	Parking Brake Switch	100	-	-
43	65265	527	Cruise Control States	100	-	-
45	61443	91	accelerator pedal position 1	50	1 Byte	-
46	65102	3411	status 2 of doors	100	-	-
46	65102	1820	ramp/wheel chairlift status	100	-	-
46	65102	1821	position of doors	100	-	For door configuration please contact the vehicle manufacturer
47	64933	3412-3441	status of doors 1 - 10	100	-	For door configuration please contact the vehicle manufacturer
48	65254	959	Seconds	1000	-	Difference to SAE: broadcast instead of on request
48	65254	960	Minutes	1000	-	Difference to SAE: broadcast instead of on request
48	65254	961	Hours	1000	-	Difference to SAE: broadcast instead of on request
48	65254	963	Month	1000	-	Difference to SAE: broadcast instead of on request
48	65254	962	Day	1000	-	Difference to SAE: broadcast instead of on request
48	65254	964	Year	1000	-	Difference to SAE: broadcast instead of on request
49	65237	3356	Alternator Status 4	1000	-	-
49	65237	3355	Alternator Status 3	1000	-	-
49	65237	3354	Alternator Status 2	1000	-	-
49	65237	3353	Alternator Status 1	1000	-	-
49	61445	524	Selected Gear	100	-	-
50	61445	523	Current Gear	100	-	-
51	65112	1725	Bellow Pressure Front Axle Left	100	-	-
51	65112	1726	Bellow Pressure Front Axle Right	100	-	-
51	65112	1727	Bellow Pressure Rear Axle Left	100	-	-
51	65112	1728	Bellow Pressure Rear Axle Right	100	-	-
52	64695	5464	Hybrid Battery Pack Remaining Charge	10000	-	-
53	61449	1807	Steering wheel angle	100	-	-